










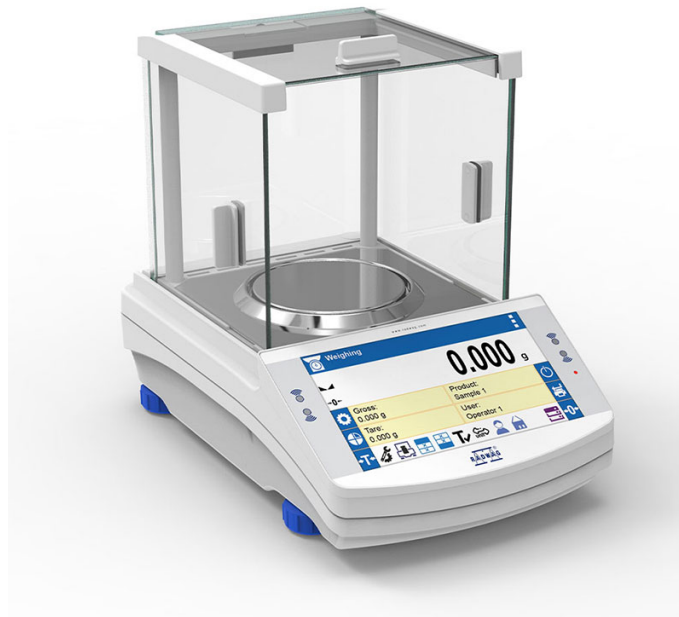













More information on the website
radwag.com/us/info,w1,ARZ

WLC 0.2.X7 Precision Balance



The drawings, photos and graphics used are for illustrative purposes only.

Functions

-  Autotest
-  Dosing
-  Plus/Minus Control
-  Percent Weighing
-  Parts counting
-  Peak hold
-  Formulation
-  Newton unit measurement
-  Statistics
-  Checkweighing
-  IR sensors
-  GLP Procedures
-  Animal weighing
-  Density determination
-  Ambient conditions monitoring
-  Replaceable unit
-  Statistical Quality Control
-  ALIBI Memory
-  Mass for titrator
-  Wi-Fi

Datasheet

Maximum capacity [Max]	0,2 kg
Readability [d]	0,001 g
Verification unit [e]	-
Tare range	-0,2 kg

Repeatability	0,0014 g
Linearity	±0,003 g
Stabilization time	2 s
Adjustment	internal (automatic)
Physical parameters	
Leveling system	manual
Display	7" graphic colour touchscreen
Weighing pan dimensions	ø100 mm
Packaging dimensions	500×400×520 mm
Net weight	1,8 kg
Gross weight	5,5 kg
Construction	
Protection class	IP 43
Database capacity	7
Communication interface	2×RS232 ¹ , USB-A, USB-B, Ethernet, Wi-Fi
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operating temperature	+10 – +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

!Balance Storage Case
 Antivibration tables
 Power Adapters
 RS 232 cables (scale - printer)
 Cigarette lighter receptacle power supply cables
 USB cable (scale - printer)
 Barcode scanners

Under-pan weighing
 RS 232, RS 485 cables
 Displays
 Receipt Printer
 RS 232, RS 485 cables
 RS 232 cables (scale - printer)
 RS 232 – RS 485 Converter

Software

- RAD Key [WX-010-0005]
- Scale Editor - EWAG 2.1 [WX-010-0173]

- Alibi Reader PC Software [WX-010-0114]
- RADWAG Development Studio [WX-010-0104]

Device dimensions

