



UMA 2.4Y.FC Automatic Weighing System

More information on the website
radwag.com/tr/info,w1,8J8



Teknik Veriler


Maximum capacity [Max]	2,1 g
Readability [d]	1 µg
Dara aralığı	-2,1 g
Repeatability (Max)	1 - 2 µg
Doğrusallık	≤ 1,5 µg
Kararlılık süresi	30 s
Ayarlama	internal (automatic)
Repeatability low load	0,5
Physical parameters	
Display	5,7" resistive colour touchscreen
Magazine positions	24 filtrów
Weighing pan dimensions	ø20 mm
Cihaz boyutları	900×535×585 mm
Haberleşme arayüzü	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi

USB-A	x2
Ethernet	x1
RS232	x2
Wi-Fi Interface	1x standard
IN/OUT arayüzü	4 IN 4 OUT standard
Çalıştırma sıcaklığı	+15 ÷ +30 °C
Depolama sıcaklığı	-20 ÷ +50 °C
Çalışma sıcaklığı değişim hızı	±0,5°C/12h (±0,3°C/4h)
Atmosferik nem	40% ÷ 60%
Atmosferik nem değişim hızı	± 2 % / 4 h



* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.




Cihaz boyutları

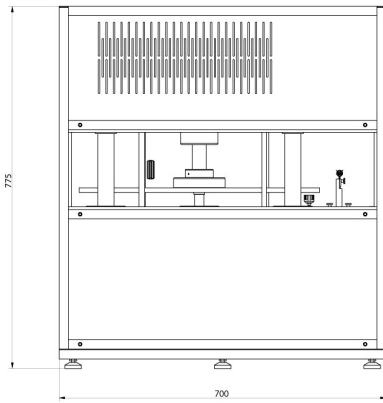

UMA-100, UMA-1000

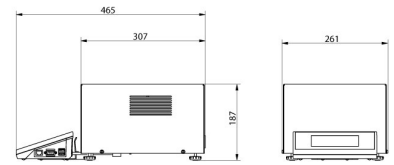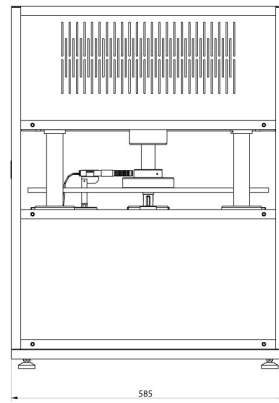

UMA-control unit

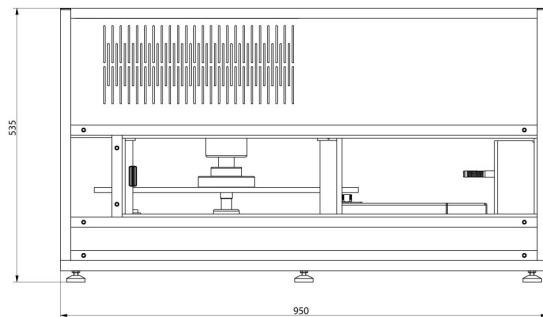

UMA-5

