




More information on the website  
[radwag.com/en/info,w1,8RK](http://radwag.com/en/info,w1,8RK)

# APP 20.5Y.KO.Q Mass Comparator

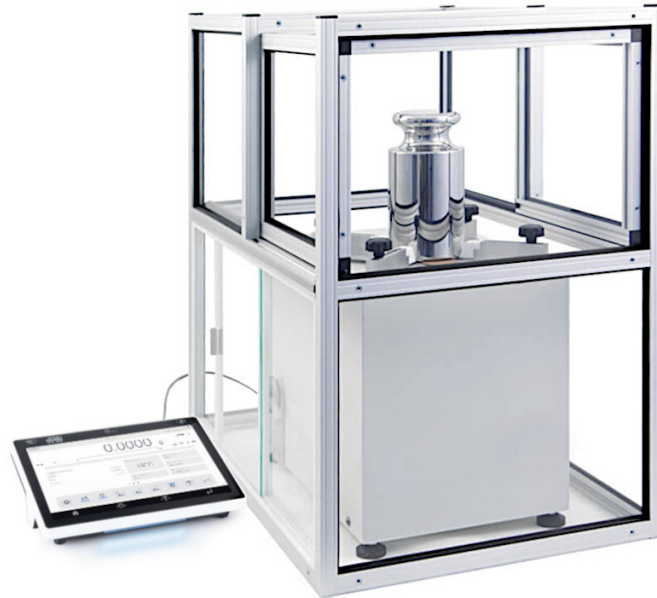

The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
E1 Calibration Range	20 kg
E2 Calibration Range	10 kg ÷ 20 kg
F1 Calibration Range	2 kg ÷ 20 kg
F2 Calibration Range	1 kg ÷ 20 kg
M1 Calibration Range	1 kg ÷ 20 kg
M2 Calibration Range	1 kg ÷ 20 kg
Maximum capacity [Max]	20.5 kg
Readability [d]	1 mg
Standard repeatability [5% Max]	3 mg
Standard repeatability [Max]	3 mg
Permissible repeatability	8 mg
Linearity	11 mg
Eccentricity (tested load)	2d / 1 mm
Electric compensation range	0 ÷ 20.5 kg
Stabilization time	20 s

Metrological parameters	
Adjustment	external
Physical parameters	
Display	10" graphic colour touchscreen
Weighing pan dimensions	ø220 (ø300) mm
Weighing device dimensions	454×275×200 mm
Controlling device dimensions	249×170×72 mm
Anti-draft chamber dimensions	700×440×550 mm
Packaging dimensions	1160×650×700 mm
Chamber packaging size	960×825×730 mm
Net weight	24 kg
Gross weight	38 kg
Supplementary weights internal	-
Supplementary weights external	-
Communication interface	
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Environmental conditions	
Operating temperature	+15 ÷ +30 °C
Operating temperature change rate	±0.5°C/12h
Relative humidity	30% ÷ 70%
Relative humidity change rate	±5%/4h

**Repeatability** is expressed as a standard deviation determined for 6 ABBA cycles. Standard deviation is experimentally determined under ambient conditions for calibration of E1 class mass standards specified in OIML R111 (Table C.1.) document.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories

Self-centering pan for APP KO comparator  
 RFID Tags  
 Additional modules  
 Protective cover for balances  
 Barcode scanners  
 Antivibration Tables  
 RS 232, RS 485 cables

Label Printers  
 THBR 2.0 System - Ambient Conditions Monitoring  
 Receipt Printer  
 Anti-Draft Chamber for Mass Comparators  
 Fingerprint Reader  
 RS 232, RS 485 cables  
 RS 232 cables (scale - printer)

## Software

- RAD Key [WX-010-0005]
- RMCS System Network Management of Calibration Process [WX-010-0048]

- RMCS Lite [WX-010-0164]

# Device dimensions

