










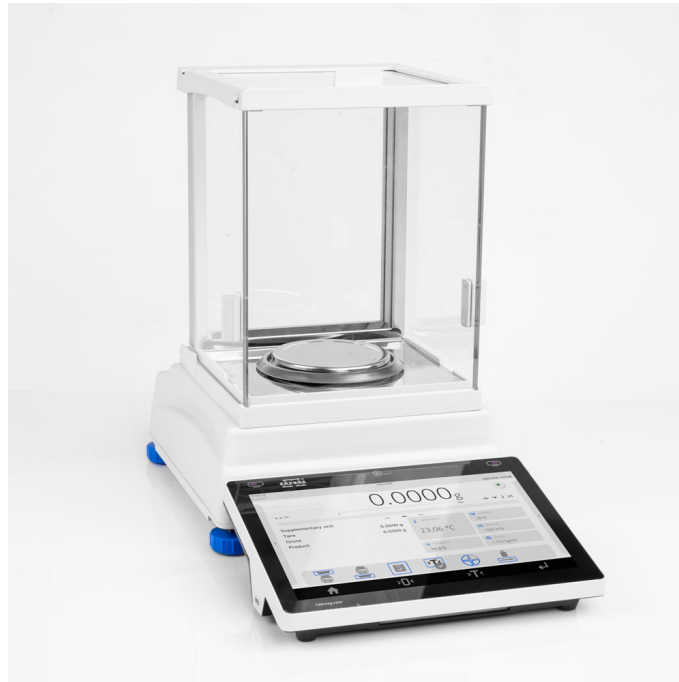














More information on the website
radwag.com/en/info,w1,AZG

AS 160.5Y Analytical Balance



The drawings, photos and graphics used are for illustrative purposes only.

Functions

-  Autotest
-  Dosing
-  Percent Weighing
-  Parts counting
-  Peak hold
-  Formulation
-  Newton unit measurement
-  Statistics
-  Checkweighing
-  IR sensors
-  GLP Procedures
-  Animal weighing
-  Pipettes Calibration
-  Air density correction
-  Density determination
-  Differential weighing
-  Ambient conditions monitoring
-  Statistical Quality Control
-  Packaged Goods Control
-  ALIBI Memory
-  Wi-Fi

Datasheet

Metrological parameters

Maximum capacity [Max]	160 g
Minimum load	-

Metrological parameters	
Readability [d]	0.1 mg
Verification unit [e]	-
Tare range	-160 g
Standard repeatability [5% Max]	0.06 mg
Standard repeatability [Max]	0.07 mg
Standard minimum weight (USP)	120 mg
Standard minimum weight (U=1%, k=2)	12 mg
Permissible repeatability [5% Max]	0.09 mg
Permissible repeatability [Max]	0.1 mg
Linearity	±0.2 mg
Stabilization time	2 s
Adjustment	internal (automatic)
OIML Class	-
Physical parameters	
Leveling system	semi-automatic - LevelSENSING
Display	10" graphic colour touchscreen
Weighing chamber doors	manual
Delivery components	Balance, weighing pan, weighing pan shield, centring ring, bottom cover, power supply.
Weighing chamber dimensions	190×190×227 mm
Weighing pan dimensions	∅100 mm
Packaging dimensions	600×400×550 mm
Net weight	7.3 kg
Gross weight	9.3 kg
Construction	
Protection class	IP 43
Components and software	
Database capacity	7
Features of use	
Touch-free operation	2 IR Sensors
Communication interface	
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0.6A; 12V DC 1.2A Balance: 12 – 15V DC 0.8A max
Power consumption max.	4 W
Environmental conditions	
Operating temperature	+10 ÷ +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles.

Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

¹ Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Antivibration Tables
Holders for laboratory flasks
Power Adapters
RS 232, RS 485 cables
Cigarette lighter receptacle power supply cables
Density determination KIT
Additional modules
USB cable (scale - printer)
Professional Weighing Tables
Protective cover for balances
Barcode scanners
Holders for test tubes and filters

Workstation for Pipettes Calibration
THBR 2.0 System - Ambient Conditions Monitoring
Weighing dishes
Antistatic ionizer
Receipt Printer
Fingerprint Reader
RS 232, RS 485 cables
Protective cover for balances
Under-pan weighing
RS 232 cables (scale - printer)
RS 232 – RS 485 Converter

Software

- E2R Weighing [WX-010-0099]
- RAD Key [WX-010-0005]
- RADWAG Remote Desktop [WX-010-0107]
- Scale Editor 2.1 [WX-010-0173]

- E2R Weighing Records [WX-010-0038]
- Label Editor R02 [WX-010-0094]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]

Device dimensions

