




More information on the website  
radwag.com/en/info,w1,B6V

# AS 3100.X2 PLUS Analytical Balance

WL-104-1095

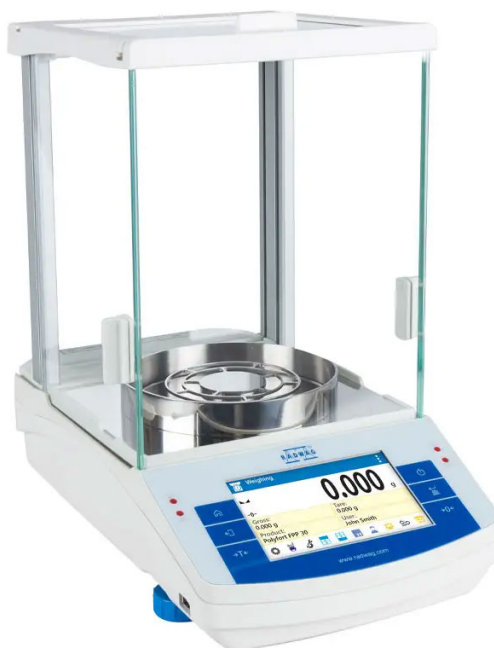

The drawings, photos and graphics used are for illustrative purposes only.

## Functions



Autotest



Dosing



Plus/Minus Control



Percent Weighing



Parts counting



Peak hold



Formulation



Newton unit  
measurement



Statistics



Checkweighing



IR sensors



GLP Procedures



Animal weighing



Density determination



Ambient conditions  
monitoring



Replaceable unit



Statistical Quality Control



ALIBI Memory



Mass for titrator



Wi-Fi

## Datasheet

| Metrological parameters |        |
|-------------------------|--------|
| Maximum capacity [Max]  | 3100 g |
| Minimum load            | -      |
| Readability [d]         | 1 mg   |
| Verification unit [e]   | -      |

|  |  |
|--|--|
| <b>Metrological parameters</b>         |  |
| Tare range                             | -3.1 kg  |
| Standard repeatability [5% Max]        | 0.5 mg   |
| Standard repeatability [Max]           | 0.6 mg   |
| Standard minimum weight (USP)          | 1 g  |
| Standard minimum weight (U=1%, k=2)    | 100 mg   |
| Permissible repeatability [5% Max]     | 0.8 mg   |
| Permissible repeatability [Max]        | 1 mg   |
| Linearity                              | ±4 mg  |
| Stabilization time                     | 2 s  |
| Adjustment                             | internal (automatic)   |
| OIML Class                             | -  |
| <b>Physical parameters</b>             |  |
| Leveling system                        | semi-automatic – LevelSENSING  |
| Display                                | 5" graphic color touchscreen   |
| Weighing chamber doors                 | manual   |
| Delivery components                    | Balance, weighing pan, weighing pan shield, centring ring, bottom cover, power supply.                                 |
| Weighing chamber dimensions            | 190×190×222 mm   |
| Weighing pan dimensions                | ø90 mm (open-work pan)   |
| Packaging dimensions W x D x H         | 545×455×575 mm   |
| Net weight                             | 7.3 kg   |
| Gross weight                           | 9.3 kg   |
| <b>Construction</b>                    |  |
| Protection class                       | IP 43  |
| <b>Components and software</b>         |  |
| Database capacity                      | Products, Users, Packaging, Customers, Formulations, Formulations reports, Ambient Conditions, Weighings, Alibi memory |
| <b>Features of use</b>                 |  |
| Touch-free operation                   | 2 IR Sensors   |
| <b>Communication interface</b>         |  |
| Communication interface                | 2×RS232 <sup>1</sup> , 2×USB-A (interchangeable), USB-B, Wi-Fi, Ethernet   |
| <b>Electrical parameters</b>           |  |
| Power supply                           | Adapter: 100 – 240V AC 50/60Hz 0.6A; 12V DC 1.2A<br>Balance: 12 – 15V DC 0.8A max                                      |
| Power consumption max.                 | 4 W  |
| <b>Environmental conditions</b>        |  |
| Operating temperature                  | +10 – +40 °C   |
| Ambient conditions monitoring (option) | THBR 2.0 System, THBR BOX, THB P, THB W, THB S   |
| Relative humidity                      | 40% – 80%  |

**Repeatability** is expressed as a standard deviation from 10 weighing cycles.

**Stabilization time** depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

<sup>1</sup> Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.



## Accessories (Additional Fee)

Antivibration Tables  
Holders for laboratory flasks  
Power Adapters  
Cigarette lighter receptacle power supply cables  
Density determination KIT  
USB cable (scale - printer)  
Professional Weighing Tables  
Barcode scanners  
Holders for test tubes and filters  
Workstation for Pipettes Calibration  
RS 232, RS 485 cables

THBR 2.0 System - Ambient Conditions Monitoring  
Displays  
Protective cover for balances  
Weighing dishes  
Antistatic ionizer  
Receipt Printer  
RS 232, RS 485 cables  
Additional modules  
Under-pan weighing  
RS 232 cables (scale - printer)  
RS 232 – RS 485 Converter


## Software (Additional Fee)

- RAD Key [WX-010-0005]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]

- Alibi Reader [WX-010-0114]
- Scale Editor 2.1 [WX-010-0173]

## Device dimensions W x D x H

AS X2 PLUS, d = 0.01 mg

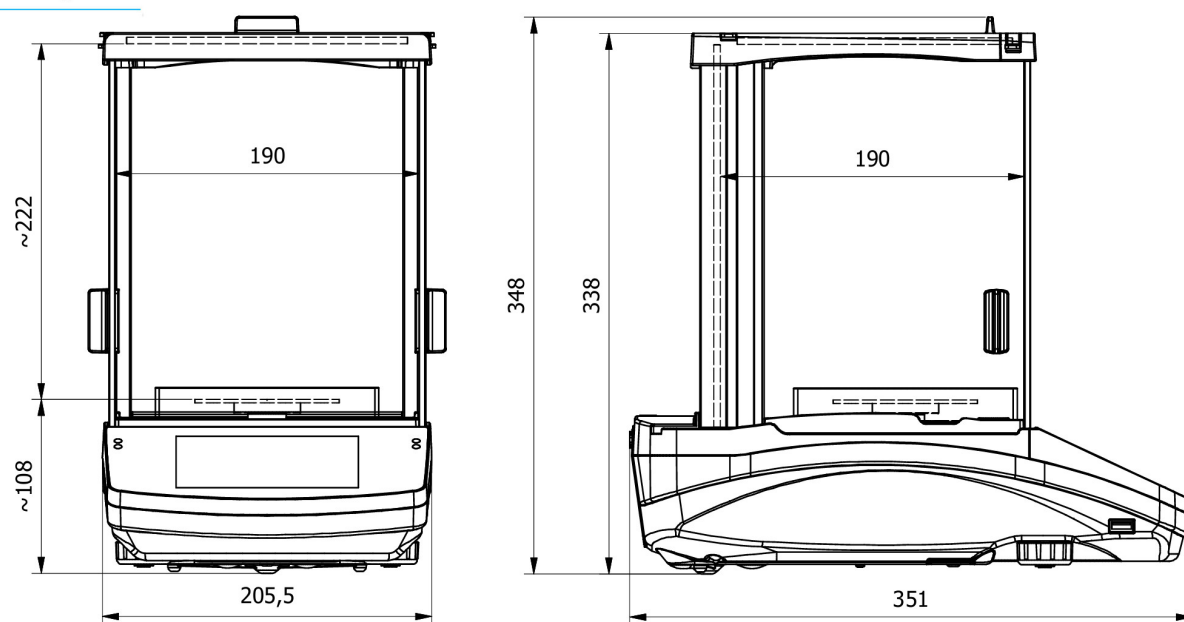

AS X2 PLUS, d = 0.1 mg

