



More information on the website
radwag.com/us/info,w1,BB7

WLC 60/C2/K Precision Balance



The drawings, photos and graphics used are for illustrative purposes only.

Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

Datasheet

| | |
|------------------------|--------|
| Maximum capacity [Max] | 60 kg |
| Minimum load | 50 g |
| Readability [d] | 1 g |
| Verification unit [e] | 10 g |
| Tare range | -60 kg |
| Repeatability | 1 g |
| Linearity | ±3 g |
| Stabilization time | 3 s |
| Adjustment | - |
| OIML Class | II |

| Physical parameters | |
|-----------------------------|--|
| Leveling system | manualny |
| Display | LCD (backlit) |
| Weighing pan dimensions | 400×500 mm |
| Packaging dimensions | 720×620×210 mm |
| Net weight | 12,5 kg |
| Gross weight | 13,5 kg |
| Construction | |
| Protection class | IP 43 |
| Communication interface | RS232 |
| Power supply | Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max |
| Operation time on batteries | 10 h (average time) |
| Operating temperature | +15 ÷ +30 °C |
| Relative humidity | 10% ÷ 85% RH no condensation |



Accessories

Antivibration tables
 Power Adapters
 RS 232 cables (scale - printer)
 Stands, wall mounting kits and mounting brackets
 Cigarette lighter receptacle power supply cables
 Displays
 RS 232, RS 485 cables

RS 232 – Ethernet Converter
 AP2-1 Current Loop Unit
 RS 232, RS 485 cables
 RS 232 – USB Converter
 RS 232 cables (scale - printer)
 RS 232 – RS 485 Converter
 Receipt Printer

Software

- RAD Key [WX-010-0005]
- Scale Editor - EWAG 2.1 [WX-010-0173]

- R Panel [WX-010-0187]

Device dimensions




WLC A2



WLC F1/K

WLC F1/R

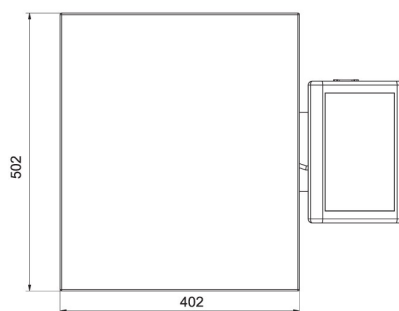

WLC C2/K

WLC C2/R