

CY10.30.C3.K.M3 Multifunctional Scale

WP-125-0039




More information on the website radwag.com/us/info,w1,BDX



The drawings, photos and graphics used are for illustrative purposes only.

Functions

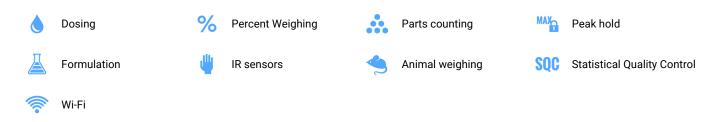

Datasheet

Maximum capacity [Max]	30 kg
Minimum load	200 g
Readability [d]	10 g
Verification unit [e]	10 g
Tare range	-30 kg
Max readability for non-verified scale	1 g
Stabilization time	3 s
Adjustment	external

OIML Class	III
Physical parameters	
Leveling system	manual
Display	10" graphic colour touchscreen
Cable length	2,5 m
Weighing pan dimensions	500×700 mm
Packaging dimensions W x D x H	850×800×270 mm
Net weight	22,7 kg
Gross weight	26,5 kg
Construction	
Protection class	IP 65 construction, IP 43 terminal
Housing	steel + ABS
Communication interface	2×USB-A, USB-C, RS 232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot
Power supply	Adapter: 100 – 240V AC 50/60Hz 1A; 15V DC 2,4A Balance: 12 – 15V DC 1,6A max; 10–19W*
Operating temperature	-10 - +40 °C
Storage temperature	-25 – +70 °C
Multiple range	YES
Features of use	
Max number of platforms	max.2

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories (Additional Fee)

MediaBox Mild steel powder coated weighing platforms RFID Tags Power Adapters Additional Weighing platforms Module Mild steel powder coated weighing platforms Additional modules Platforms in plastic casing

Software (Additional Fee)

• E2R Weighing [WX-010-0099]

- RAD Key [WX-010-0005]
- RADWAG Remote Desktop [WX-010-0107]

Protective cover for balances Barcode scanners Label Printers RS 232, RS 485 cables Stands, wall mounting kits and mounting brackets Fingerprint Reader RS 232 – USB Converter Receipt Printer

- E2R Weighing Records [WX-010-0038]
- Label Editor R02 [WX-010-0094]
- Scale Editor EWAG 2.1 [WX-010-0173]

Device dimensions W x D x H

