




More information on the website  
[radwag.com/en/info,w1,CBT](http://radwag.com/en/info,w1,CBT)

# C315.P.60 Postal Scale for Packages

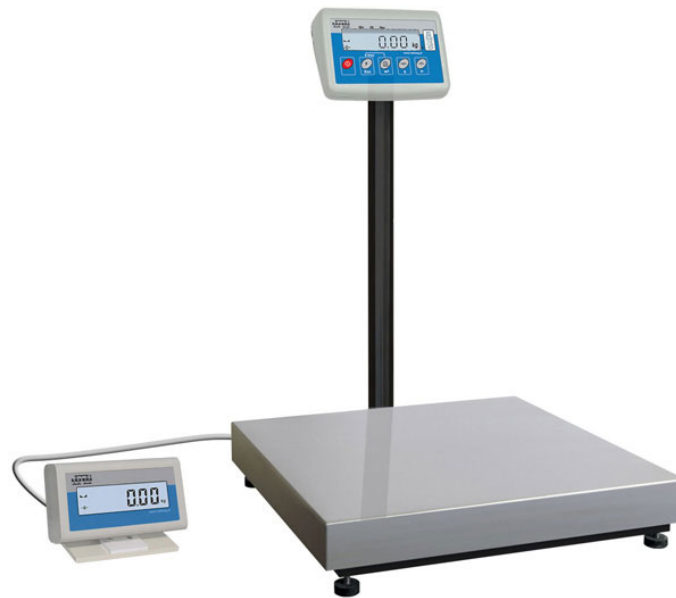

The drawings, photos and graphics used are for illustrative purposes only.

## Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

 GLP Procedures

 Animal weighing

 ALIBI Memory

## Datasheet

| Metrological parameters                |        |
|--|--------|
| Maximum capacity [Max]                 | 60 kg  |
| Minimum load                           | 100 g  |
| Readability [d]                        | 20 g   |
| Verification unit [e]                  | 20 g   |
| Tare range                             | -60 kg |
| Max readability for non-verified scale | -      |
| OIML Class                             | III    |

| Physical parameters         |                                     |
|-----------------------------|-------------------------------------|
| Display                     | LCD (backlit)                       |
| Weighing pan dimensions     | 400×500 mm                          |
| Packaging dimensions        | 720×620×210 mm                      |
| Net weight                  | 15.5 kg                             |
| Gross weight                | 17.8 kg                             |
| Construction                |                                     |
| Protection class            | IP 65 construction, IP 43 terminal  |
| Construction                | mild steel St3S                     |
| Weighing pan material       | Stainless steel AISI304             |
| Communication interface     |                                     |
| Communication interface     | RS232                               |
| Optional interfaces         | RS232                               |
| Electrical parameters       |                                     |
| Power supply                | 100 – 240 V AC 50/60 Hz and battery |
| Power consumption max.      | 5 W                                 |
| Operation time on batteries | max 8h                              |
| Environmental conditions    |                                     |
| Operating temperature       | 0 – +40 °C                          |
| Storage temperature         | -10 – +50 °C                        |
| Relative humidity           | 10% – 85% RH no condensation        |
| Indicator                   | C315                                |



Extra payment for verification



## Accessories

RS 232 cables (scale - printer)  
Cigarette lighter receptacle power supply cables  
Displays  
RS 232 – Ethernet Converter  
AP2-1 Current Loop Unit


RS 232, RS 485 cables  
RS 232 – USB Converter  
RS 232 cables (scale - printer)  
RS 232 – RS 485 Converter  
Receipt Printer

## Software

• RAD Key [WX-010-0005]  
• R-Lab [WX-010-0080]

• R-Panel [WX-010-0187]  
• Scale Editor 2.1 [WX-010-0173]

## Device dimensions

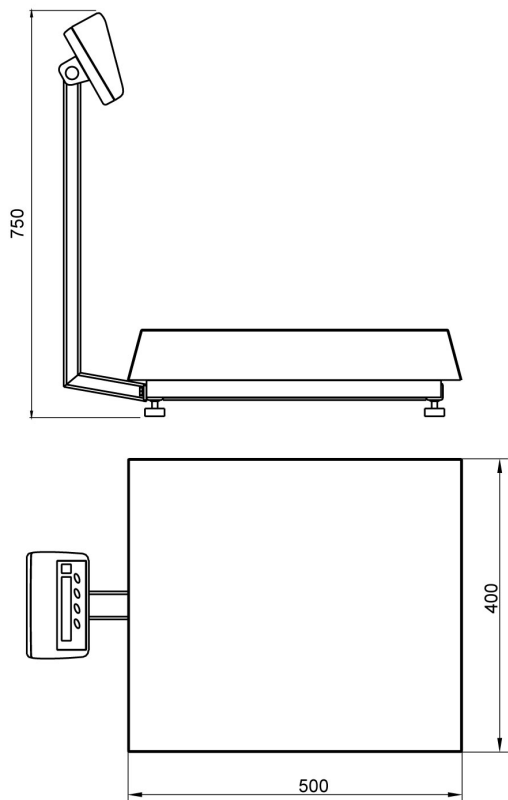

C315.P.60