



More information on the website  
[radwag.com/us/info,w1,DQV](http://radwag.com/us/info,w1,DQV)

# WTC 3000 Precision Balance




The drawings, photos and graphics used are for illustrative purposes only.

## Functions


 Plus/Minus Control

 Percent Weighing

 Parts counting

 Peak hold

 GLP Procedures

 ALIBI Memory

## Datasheet

|                            |          |
|----------------------------|----------|
| Maximum capacity [Max]     | 3100 g   |
| Readability [d]            | 0,1 g    |
| Tare range                 | -3100 g  |
| Repeatability              | 0,1 g    |
| Linearity                  | ±0,3 g   |
| Stabilization time         | 2 s      |
| Adjustment                 | external |
| <b>Physical parameters</b> |          |
| Leveling system            | manualny |

| Physical parameters         |  |
|-----------------------------|--|
| Display                     | LCD (backlit)  |
| Weighing pan dimensions     | 128×128 mm   |
| Packaging dimensions        | 330×230×140 mm   |
| Net weight                  | 1,3 kg   |
| Gross weight                | 2 kg   |
| Construction                |  |
| Protection class            | IP 43  |
| Communication interface     | RS232, USB-A, USB-B  |
| Power supply                | Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A<br>Balance: 10 – 15VDC 0,6A max |
| Operation time on batteries | 15 h (average time)  |
| Operating temperature       | +15 ÷ +30 °C   |



## Accessories

Antivibration tables  
 Power Adapters  
 RS 232 cables (scale - printer)  
 Cigarette lighter receptacle power supply cables  
 Displays



RS 232, RS 485 cables  
 Receipt Printer  
 RS 232, RS 485 cables  
 RS 232 cables (scale - printer)

## Software

• RAD Key [WX-010-0005]  
 • Alibi Reader PC Software [WX-010-0114]

• R Panel [WX-010-0187]  
 • Scale Editor - EWAG 2.1 [WX-010-0173]

## Device dimensions

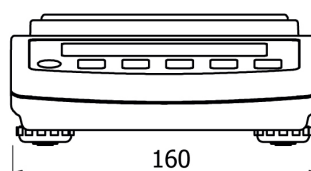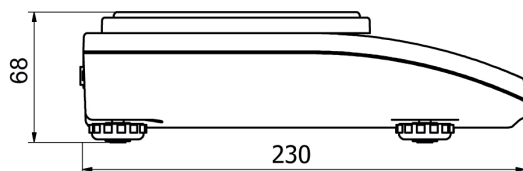

WTC:  $d = 0.01 \text{ g}$ ,  $d = 0.1 \text{ g}$