radwag.com

XA 220.5Y □□□□

WL-110-0012

More information on the website
radwag.com/ja/info,w1,DU8

The drawings, photos and graphics used are for illustrative purposes only.

□□

- Autotest
- Dosing
- Percent Weighing
- Parts counting
- Peak hold
- Formulation
- Newton unit measurement
- Statistics
- Checkweighing
- IR sensors
- Under-pan weighing
- GLP Procedures
- Animal weighing
- Pipettes Calibration
- Air density correction
- Density determination
- Differential weighing
- Ambient conditions monitoring
- Statistical Quality Control
- Packaged Goods Control
- ALIBI Memory
- Wi-Fi

□□□□□□

□□□□□□□□	
□□□□□□ [Max]	220 g
□□□□	10 mg

□□□□□□□	
□□□□ [d]	0,1 mg
□□□□□□□□ [e]	1 mg
□□□□	-220 g
□□□□□□□ [5% Max]	0,05 mg
□□□□□□□ [Max]	0,08 mg
□□□□□□□ (USP)	100 mg
□□□□□□□ (U=1%, k=2)	10 mg
□□□□□□□ [5% Max]	0,07 mg
□□□□□□□ [Max]	0,1 mg
□□□	±0,2 mg
□□□□	0,2 mg
□□□□□□□□	1×10^{-6}700 mA□□□□□□□□□□□ - 1A□×Rt
□□□□□	1,3 s
□□	□□□□□□□□ (□□□□□□□□)
OIML□□□	I
□□□□□□□□	
□□□□□□□□□	– LevelSENSING
□□□□□□	10" □□□□□□ + □□□□□ □□□□
□□□□□□	7□□□□□□□□□□□□
□□□□□	, , , , , , .
□□□□□	168×160×228 mm
□□□□□	ø100 mm
□□□□	750×492×595 mm
□□□□	9,8 kg
□□□	16,5 kg
□□□	
□□□□□	IP 43
□□□□□□□□□□	
□□□□□□□□□□	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
□□□□□□□□	
□□	Adapter: 100 – 240V AC 50/60Hz 1A; 15V DC 2,4A : 12 – 15V DC 1,6A max*
□□□□	
□□□□	+10 – +40 °C
□□□□□□□	±0,3 °C / 1 h (±1 °C / 8 h)
□□□□	20% – 80%
□□□□□□□	±1% / h (±4% / 8 h)

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Additional fee for verification

□□□□□ (Additional Fee)

□□□□□□□□
RFID□□
□□□
□□□□□□
RS 232□RS 485 □□□□
□□□□□□□□□□□
□□□□□□□□□□□
□□□□□□□
□□□□□□□□□□□□□□
□□□□□□□□□□□□
□□□□□□□□□
□□□□□□□□□□
□□□□□□□□

□□□□□□□
THBR 2.0 □□□□ - □□□□ - □□□□□□□□□□
RS 232□RS 485 □□□□
□□□□□□□□□
□□□□□□□□□
XA 4Y□□□XA 5Y□□□□□□□□□□□□□
□□□
□□□□□□□□□□□□□□□□□
□□□□□□□□□
□□□□□□□
RS 232 – USB □□□□□
□□□□□□□□□

□□□□□□□ (Additional Fee)

- [WX-010-0099]
- [WX-010-0005]
- [WX-010-0107]
- [WX-010-0173]
- [WX-010-0038]
- [WX-010-0094]
- [WX-010-0080]
- [WX-010-0104]
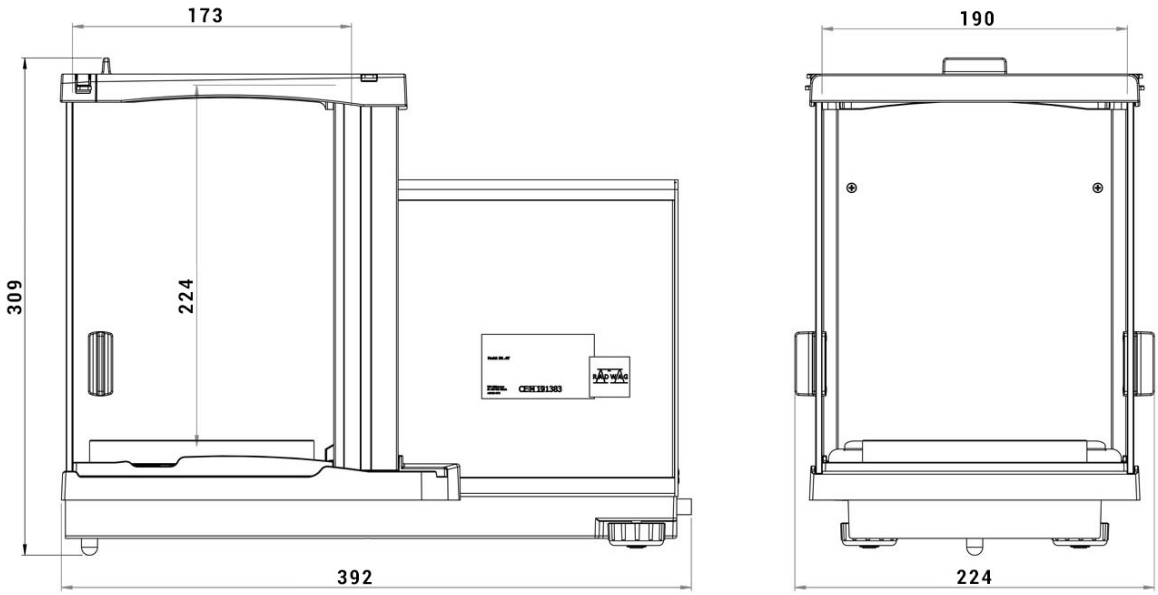
□□□□□□□□