

CY10.30.C2.K.M3 Multifunctional Scale






More information on the website radwag.com/en/info,w1,H4R



The drawings, photos and graphics used are for illustrative purposes only.

Functions

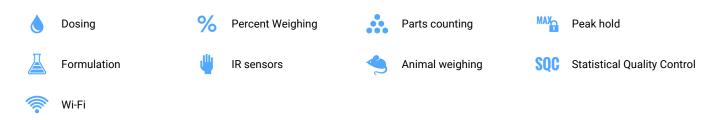

Datasheet

Metrological parameters	
Maximum capacity [Max]	30 kg
Minimum load	200 g
Readability [d]	10 g
Verification unit [e]	10 g
Tare range	-30 kg
Max readability for non-verified scale	1 g
Stabilization time	2 s

external III
III
manual
10" graphic colour touchscreen
2.5 m
400×500 mm
720×620×210 mm
12.1 kg
14.1 kg
IP 65 construction, IP 43 terminal
steel + ABS
2×USB-A, USB-C, RS 232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot
Adapter: 100 – 240V AC 50/60Hz 1A; 15V DC 2.4A Balance: 12 – 15V DC 1.6A max; 10–19W*
-10 - +40 °C
-25 – +70 °C
YES
max.2

Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. *Power consumption depends on the terminal configuration and the number and type of external devices connected.

 \ast Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories (Additional Fee)

MediaBox Mild steel powder coated weighing platforms RFID Tags Power Adapters Additional Weighing platforms Module Mild steel powder coated weighing platforms Additional modules Platforms in plastic casing

Software (Additional Fee)

Protective cover for balances Barcode scanners Label Printers RS 232, RS 485 cables Stands, wall mounting kits and mounting brackets Fingerprint Reader RS 232 – USB Converter Receipt Printer

- E2R Weighing [WX-010-0099] RAD Key [WX-010-0005] RADWAG Remote Desktop [WX-010-0107]

- E2R Weighing Records [WX-010-0038] Label Editor R02 [WX-010-0094] Scale Editor 2.1 [WX-010-0173]

Device dimensions

