



# RMC 20000.5Y Robotic Mass Comparator

More information on the website  
[radwag.com/en/info,w1,JQ4](http://radwag.com/en/info,w1,JQ4)



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
E0 Calibration Range	1 kg ÷ 20 kg *
E1 Calibration Range	1 kg ÷ 20 kg
E2 Calibration Range	1 kg ÷ 20 kg
F1 Calibration Range	1 kg ÷ 20 kg
F2 Calibration Range	1 kg ÷ 20 kg
Maximum capacity [Max]	20.2 kg
Readability [d]	0.1 mg
Standard repeatability [5% Max]	0.15 mg
Standard repeatability [Max]	0.2 mg
Permissible repeatability	0.3 mg
Electric compensation range	-50 g ÷ +200 g
Stabilization time	30 s
Adjustment	internal (automatic)
Physical parameters	
Display	10" graphic colour touchscreen

<b>Physical parameters</b>	
Magazine positions	10
Weighing pan dimensions	ø190 mm - self centering
Device dimensions	2700×1400×2000 mm
Controlling device dimensions	249×170×72 mm

<b>Communication interface</b>	
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot

<b>Electrical parameters</b>	
Power supply	110 – 240 V AC 50/60 Hz

<b>Environmental conditions</b>	
Operating temperature	+15 ÷ +30 °C
Operating temperature change rate	±0.5°C/12h (±0.3°C/4h)
Relative humidity	40% ÷ 60%
Relative humidity change rate	±5%/12h (2%/4h)

Repeatability is expressed as a standard deviation determined for 6 ABBA cycles.

\* E0 standard determined from 1±5 limiting error according to OIML R111 for class E1.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.




## Accessories

RFID Tags	THBR 2.0 System - Ambient Conditions Monitoring
Additional modules	Receipt Printer
Protective cover for balances	Fingerprint Reader
Barcode scanners	RS 232, RS 485 cables
RS 232, RS 485 cables	RS 232 cables (scale - printer)

## Software

- RAD Key [WX-010-0005]
- RMCS System Network Management of Calibration Process [WX-010-0048]
- RMCS Lite [WX-010-0164]

## Device dimensions

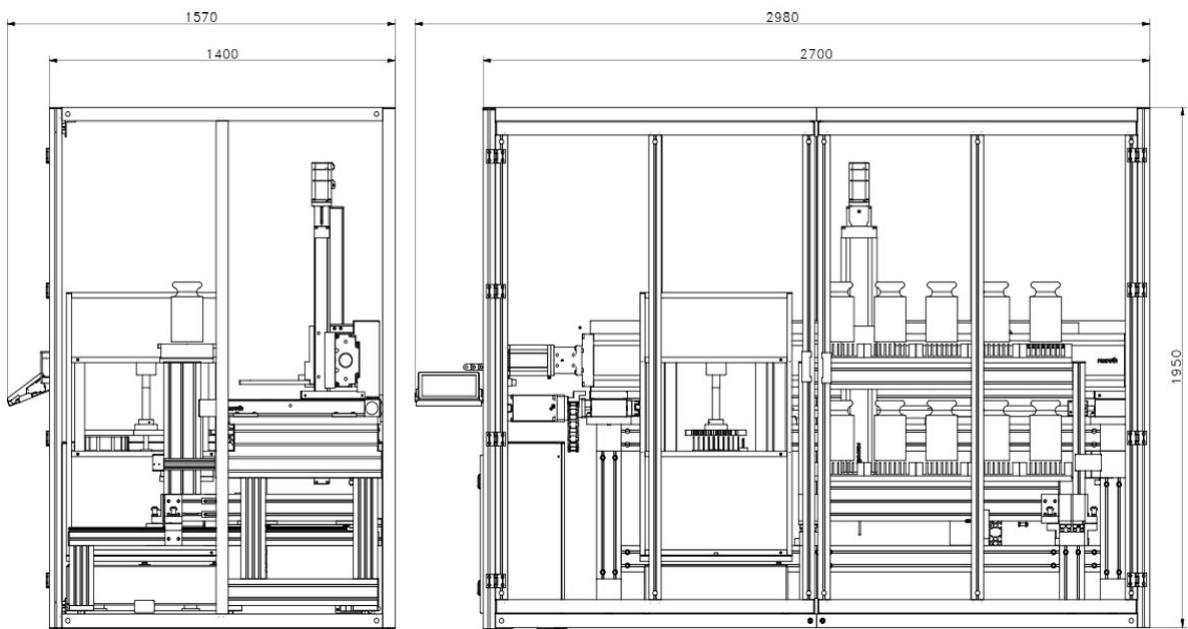

## Wymiary serwisowo-użytkowe urządzenia

