



More information on the website
radwag.com/us/info,w1,L5U

PM02.EX-1-2 intrinsically safe power supply intended for EX scale



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

| Physical parameters | |
|------------------------|---|
| Cable length | 3 m |
| Device dimensions | 216×174×64 mm |
| Construction | |
| Protection class | IP 66 / 68 |
| Housing | Stainless steel |
| ATEX Certification | II 2G Ex eb mb [ib] IIC T4 Gb II 2D Ex tb [ib] IIIC T70°C Db |
| Working in zones | 1, 2 (gases); 21, 22 (dusts) |
| Power supply | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Power consumption max. | 15 W |
| Operating conditions | |
| Operating temperature | -20 – +40 °C |
| Storage temperature | -20 – +60 °C |
| Relative humidity | 10% – 85% RH no condensation |





Compatible with

Stainless steel HRP EX.H platforms
HRP Platforms High Capacity

Stainless steel HRP.H platforms
HRP EX Platforms High Capacity

Device dimensions

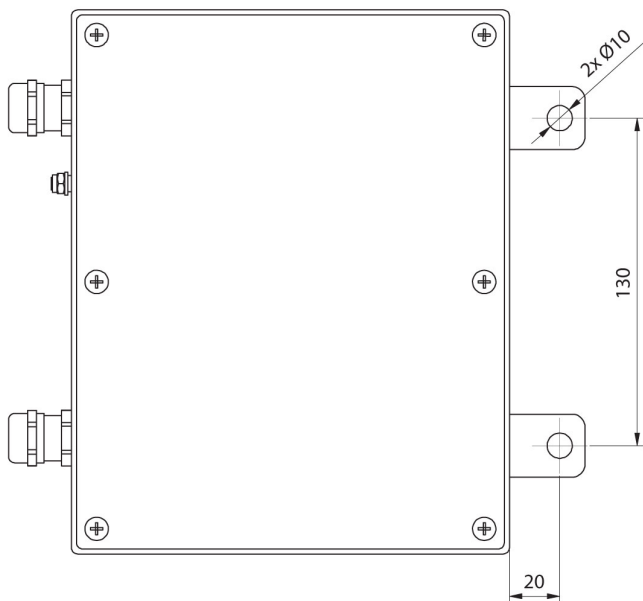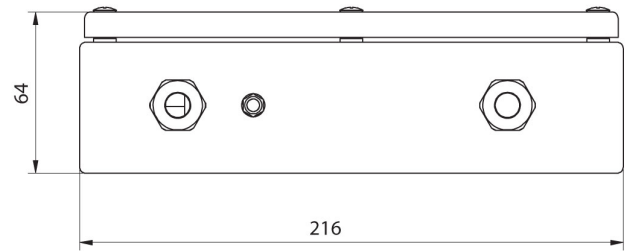

PM01.EX