




More information on the website  
[radwag.com/en/info,w1,NVE](http://radwag.com/en/info,w1,NVE)

# XA 6.4Y.M.A.S PLUS Microbalance

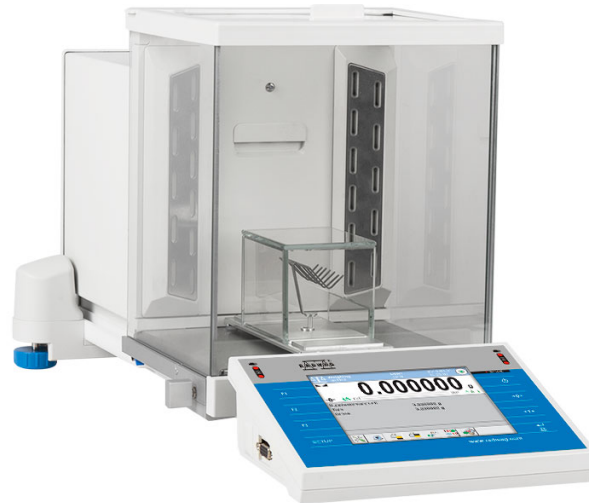

The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
Maximum capacity [Max]	6 g
Readability [d]	1 µg
Verification unit [e]	1 µg
Tare range	-6 g
Standard repeatability [5% Max]	1.3 µg
Standard repeatability [Max]	3.5 µg
Standard minimum weight (USP)	2.6 mg
Standard minimum weight (U=1%, k=2)	0.26 mg
Permissible repeatability [5% Max]	2 µg
Permissible repeatability [Max]	5 µg
Linearity	±9 µg
Adjustment	internal
Physical parameters	
Leveling system	automatic - Reflex Level System
Display	5.7" resistive colour touchscreen

Physical parameters	
Weighing chamber doors	automatic
Delivery components	Microbalance, weighing pan, weighing pan shield, power supply, brush, fabric dust cover.
Packaging dimensions	765×515×545 mm
Construction	
Protection class	IP 43
Electrical parameters	
Power supply	Adapter: 100 – 240V AC 50/60Hz 1A; 15V DC 2.4A Balance: 12 – 15V DC 1.1A max



## Accessories

Label Printers  
Receipt Printer

RS 232 – USB Converter  
Professional Weighing Tables

## Software

- RAD Key [WX-010-0005]
- RADWAG Development Studio [WX-010-0104]

- R-Lab [WX-010-0080]