



More information on the website
radwag.com/en/info,w1,0QN

C315.4B.500.C-1 Bed Scale



The drawings, photos and graphics used are for illustrative purposes only.

Functions



Internal battery



Peak hold



GLP Procedures



ALIBI Memory



BMI

Datasheet

Metrological parameters	
Maximum capacity [Max]	500 kg
Readability [d]	200 g
Tare range	-500 kg
OIML Class	III
Physical parameters	
Display	LCD (backlit)
Packaging dimensions	390×820×360 mm
Net weight	18.5 kg
Gross weight	28 kg

Communication interface

Communication interface RS232

Electrical parameters

Power supply 100 – 240 V AC 50/60 Hz and battery

Power consumption max. 5 W

Operation time on batteries up to 8 h

Environmental conditions

Operating temperature 0 – +40 °C

Relative humidity 10% – 85% RH no condensation

According to MDR regulations, this scale is not a medical device.



Extra payment for verification

Accessories

Power Adapters

RS 232 cables (scale - printer)

Cigarette lighter receptacle power supply cables

Displays

Displays

RS 232, RS 485 cables

RS 232 – Ethernet Converter

AP2-1 Current Loop Unit

RS 232, RS 485 cables

RS 232 – USB Converter

RS 232 – RS 485 Converter

Receipt Printer

Software

• RAD Key [WX-010-0005]

• R-Lab [WX-010-0080]


• R-Panel [WX-010-0187]

• Scale Editor 2.1 [WX-010-0173]

Device dimensions



C315.8B

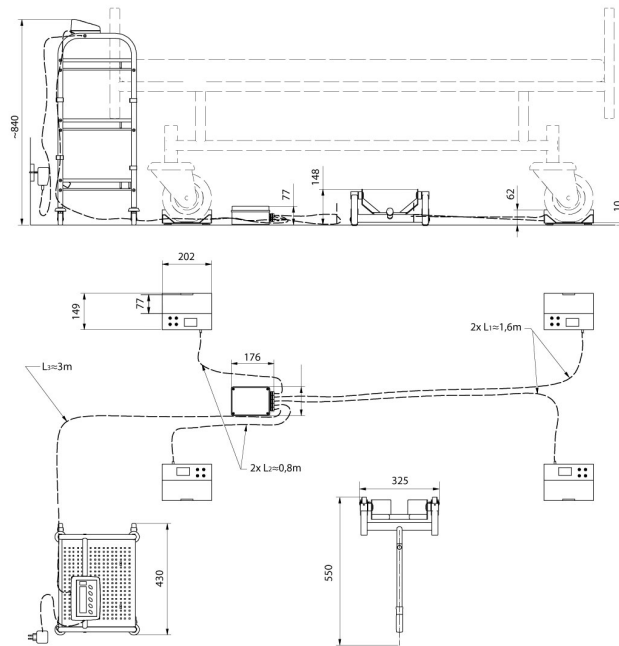

C315.4B