



More information on the website  
[radwag.com/us/info,w1,Q67](http://radwag.com/us/info,w1,Q67)


# WTC 200 Precision Balance





The drawings, photos and graphics used are for illustrative purposes only.

## Functions

 Plus/Minus Control

 Percent Weighing

 Parts counting

 Peak hold

 GLP Procedures

 ALIBI Memory

## Datasheet

Maximum capacity [Max]	200 g
Readability [d]	0,001 g
Tare range	-200 g
Repeatability	0,002 g
Linearity	±0,004 g
Stabilization time	2 s
Adjustment	external
<b>Physical parameters</b>	
Leveling system	manual

Physical parameters	
Display	LCD (backlit)
Weighing pan dimensions	ø100 mm
Packaging dimensions	330×230×140 mm
Net weight	0,96 kg
Gross weight	1 kg
Construction	
Protection class	IP 43
Communication interface	RS232, USB-A, USB-B
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	15 h (average time)
Operating temperature	+15 – +30 °C



## Accessories

Antivibration tables  
 Power Adapters  
 RS 232 cables (scale - printer)  
 Cigarette lighter receptacle power supply cables  
 Displays



RS 232, RS 485 cables  
 Receipt Printer  
 RS 232, RS 485 cables  
 RS 232 cables (scale - printer)

## Software

• RAD Key [WX-010-0005]  
 • Alibi Reader PC Software [WX-010-0114]

• R Panel [WX-010-0187]  
 • Scale Editor - EWAG 2.1 [WX-010-0173]

## Device dimensions

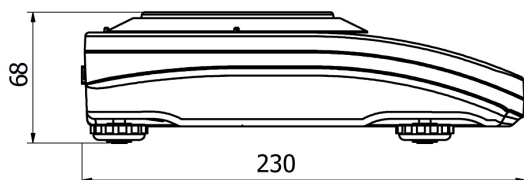

WTC, d = 0.001 g