

CY10.15.F1.K.M3 Multifunctional Scale




More information on the website radwag.com/en/info,w1,QXZ

WP-125-0016



The drawings, photos and graphics used are for illustrative purposes only.

Functions

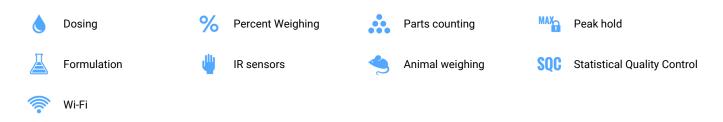

Datasheet

Metrological parameters		
Maximum capacity [Max]	15 kg	
Minimum load	100 g	
Readability [d]	5 g	
Verification unit [e]	5 g	
Tare range	-15 kg	
Max readability for non-verified scale	0.5 g	
Stabilization time	2 s	

ouchscreen
ouchscreen
IP 43 terminal
232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot
V AC 50/60Hz 1A; 15V DC 2.4A DC 1.6A max; 10−19W*
;

Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. *Power consumption depends on the terminal configuration and the number and type of external devices connected.

 \ast Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories (Additional Fee)

MediaBox Mild steel powder coated weighing platforms RFID Tags Power Adapters Additional Weighing platforms Module Mild steel powder coated weighing platforms Additional modules Platforms in plastic casing


Software (Additional Fee)


Protective cover for balances Barcode scanners Label Printers RS 232, RS 485 cables Stands, wall mounting kits and mounting brackets Fingerprint Reader RS 232 – USB Converter Receipt Printer

- E2R Weighing [WX-010-0099] RAD Key [WX-010-0005] RADWAG Remote Desktop [WX-010-0107]

- E2R Weighing Records [WX-010-0038] Label Editor R02 [WX-010-0094] Scale Editor 2.1 [WX-010-0173]

Device dimensions

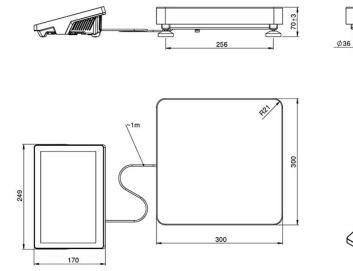



226