




More information on the website
radwag.com/en/info,w1,SKZ

PS 750.5Y Precision Balance

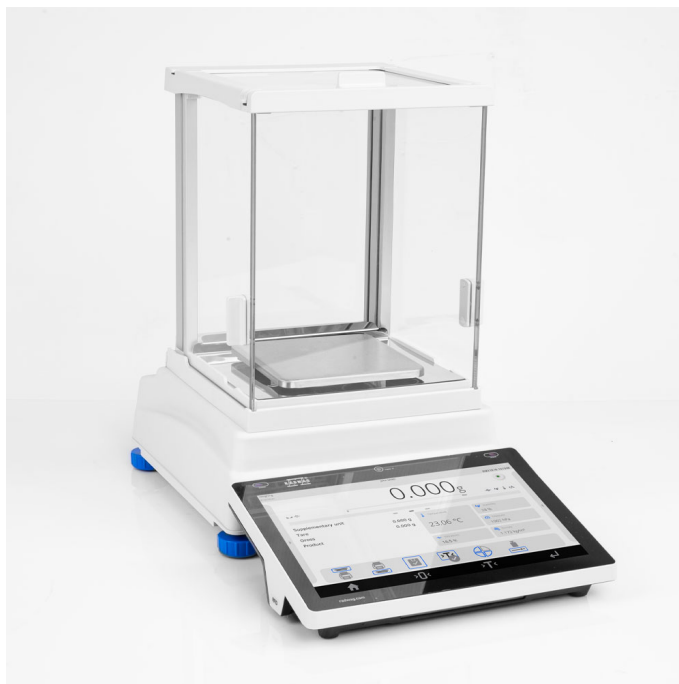

The drawings, photos and graphics used are for illustrative purposes only.

Functions



Autotest



Dosing



Percent Weighing



Parts counting



Peak hold



Formulation



Newton unit
measurement



Statistics



Checkweighing



IR sensors



GLP Procedures



Animal weighing



Pipettes Calibration



Air density correction



Density determination



Differential weighing



Ambient conditions
monitoring



Statistical Quality Control



Packaged Goods Control



ALIBI Memory



Wi-Fi

Datasheet

Metrological parameters

Maximum capacity [Max] 750 g

Minimum load -

| | |
|--|---|
| Metrological parameters | |
| Readability [d] | 1 mg |
| Verification unit [e] | - |
| Tare range | -750 g |
| Standard repeatability [5% Max] | 0.5 mg |
| Standard repeatability [Max] | 1.5 mg |
| Standard minimum weight (USP) | 1 g |
| Standard minimum weight (U=1%, k=2) | 0.1 g |
| Linearity | ±3 mg |
| Stabilization time | 2 s |
| Adjustment | internal (automatic) |
| OIML Class | - |
| Sensitivity temperature drift | $2 \times 10^{-6} / ^\circ\text{C} \times \text{Rt}$ |
| Physical parameters | |
| Leveling system | semi-automatic - LevelSENSING |
| Display | 10" graphic colour touchscreen |
| Delivery components | Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply. |
| Weighing pan dimensions | 128×128 mm |
| Packaging dimensions | 600×400×550 mm |
| Net weight | 3.9 kg |
| Gross weight | 5 kg |
| Construction | |
| Protection class | IP 43 |
| Components and software | |
| Database capacity | 7 |
| Features of use | |
| Touch-free operation | 2 IR Sensors |
| Communication interface | |
| Communication interface | 2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot |
| Electrical parameters | |
| Power supply | Adapter: 100 – 240V AC 50/60Hz 0.6A; 12V DC 1.2A Balance: 12 – 15V DC 0.8A max |
| Power consumption | 4 W |
| Environmental conditions | |
| Operating temperature | +10 ÷ +40 °C |
| Ambient conditions monitoring (option) | THBR 2.0 System, THBR BOX, THB P, THB W, THB S |
| Relative humidity | 40% ÷ 80% |

Repeatability is expressed as a standard deviation from 10 weighing cycles.

Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

¹ Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Balance Storage Case
Antivibration Tables
Power Adapters
Cigarette lighter receptacle power supply cables
Additional modules
USB cable (scale - printer)
Professional Weighing Tables
Density determination KIT
Protective cover for balances
Barcode scanners

Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan
RS 232, RS 485 cables
THBR 2.0 System - Ambient Conditions Monitoring
Receipt Printer
Fingerprint Reader
RS 232, RS 485 cables
Protective cover for balances
Under-pan weighing
RS 232 cables (scale - printer)
RS 232 – RS 485 Converter

Software

- E2R Weighing [WX-010-0099]
- RAD Key [WX-010-0005]
- RADWAG Remote Desktop [WX-010-0107]
- Scale Editor 2.1 [WX-010-0173]

- E2R Weighing Records [WX-010-0038]
- Label Editor R02 [WX-010-0094]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]

Device dimensions

