




More information on the website  
[radwag.com/us/info,w1,SKZ](http://radwag.com/us/info,w1,SKZ)

# PS 750.5Y Precision Balance

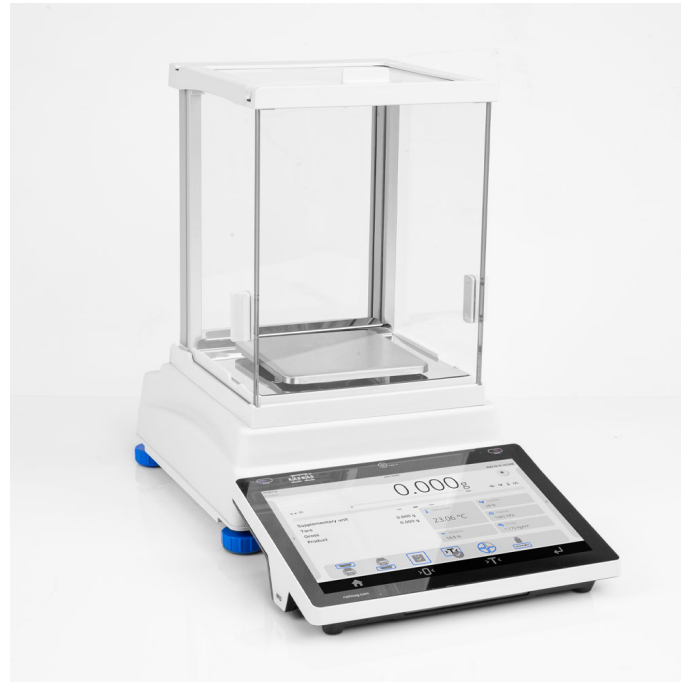

The drawings, photos and graphics used are for illustrative purposes only.

## Functions

-  Autotest
-  Dosing
-  Percent Weighing
-  Parts counting
-  Peak hold
-  Formulation
-  Newton unit measurement
-  Statistics
-  Checkweighing
-  IR sensors
-  Under-pan weighing
-  GLP Procedures
-  Animal weighing
-  Pipettes Calibration
-  Air density correction
-  Density determination
-  Differential weighing
-  Ambient conditions monitoring
-  Statistical Quality Control
-  Packaged Goods Control
-  ALIBI Memory
-  Wi-Fi

## Datasheet

Maximum capacity [Max]	750 g
Minimum load	20 mg
Readability [d]	1 mg

Verification unit [e]	10 mg
Tare range	-750 g
Standard repeatability [5% Max]	0,5 mg
Standard repeatability [Max]	1,5 mg
Standard minimum weight (USP)	1 g
Standard minimum weight (U=1%, k=2)	0,1 g
Linearity	±3 mg
Stabilization time	2 s
Adjustment	internal (automatic)
OIML Class	II
Sensitivity temperature drift	$2 \times 10^{-6} / ^\circ\text{C} \times \text{Rt}$
<b>Physical parameters</b>	
Leveling system	semi-automatic – LevelSENSING
Display	10" graphic colour touchscreen
Delivery components	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.
Weighing pan dimensions	128x128 mm
Packaging dimensions	600x400x550 mm
Net weight	3,9 kg
Gross weight	5 kg
<b>Construction</b>	
Protection class	IP 43
Database capacity	7
<b>Features of use</b>	
Touch-free operation	2 IR Sensors
Communication interface	2xUSB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Power supply	Adapter: 100 – 240V AC 50/60Hz 1A; 15V DC 2,4A Balance: 12 – 15V DC 1,6A max; 10–19W*
Operating temperature	+10 – +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% – 80%

Répétabilité exprimée comme un écart standardisé de 10 placements de chargé.

Temps de stabilisation dépend de conditions externes et de la dynamique du placement d'un poids sur le plateau; déterminé pour le profil FAST

<sup>1</sup> Les scanners de codes-barres disponibles en accessoire coopèrent avec la balance en utilisant uniquement l'interface RS232.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Extra payment for verification



## Accessories

Balance Storage Case  
Antivibration tables  
Power Adapters  
Cigarette lighter receptacle power supply cables  
Additional modules  
Protective cover for balances  
USB cable (scale - printer)  
Professional Weighing Tables  
Density determination KIT  
Protective cover for balances

Barcode scanners  
Anti-draft Chamber for balances with a weighing pan 128×128mm  
RS 232, RS 485 cables  
THBR 2.0 System - Ambient Conditions Monitoring  
Receipt Printer  
Fingerprint Reader  
RS 232, RS 485 cables  
Under-pan weighing  
RS 232 cables (scale - printer)  
RS 232 – RS 485 Converter

## Software

- E2R Weighing [WX-010-0099]
- RAD Key [WX-010-0005]
- RADWAG Remote Desktop [WX-010-0107]
- RADWAG Development Studio [WX-010-0104]

- E2R Weighing Records [WX-010-0038]
- Label Editor R02 [WX-010-0094]
- Scale Editor - EWAG 2.1 [WX-010-0173]

## Device dimensions

