




More information on the website
radwag.com/es/info,w1,UC3

Protocolo de comunicación Radwag (PUE HY10)

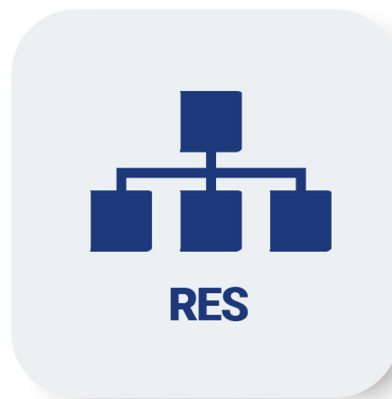

The drawings, photos and graphics used are for illustrative purposes only.

Descripción

Character communication protocol is designed for communication between RADWAG balance and external device via RS232, Ethernet or Wi-Fi* interfaces. The protocol consists of commands sent from the external device to the balance and responses sent from the balance to the device. Responses are sent from the balance each time a command is received as a response to the command. The commands that make up the communication protocol allow you to obtain information about the status of the balance and ways to influence its operation, for example, they allow you to receive weighing results from the balance, control the display, etc.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Trabaja con

Balanza de alta resolución inoxidable HY10.HRP.H
Báscula multifuncional HY10
Báscula multifuncional inoxidable HY10 H

Balanza de alta resolución HY10.HRP
Balanza HY10.H para CCE
Terminal de pesaje PUE HY10