




# Protocollo di comunicazione Radwag (PUE HY10)

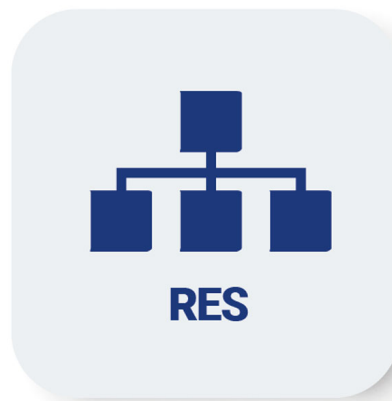

The drawings, photos and graphics used are for illustrative purposes only.

## Caratteristiche generali

Character communication protocol is designed for communication between RADWAG balance and external device via RS232, Ethernet or Wi-Fi\* interfaces. The protocol consists of commands sent from the external device to the balance and responses sent from the balance to the device. Responses are sent from the balance each time a command is received as a response to the command. The commands that make up the communication protocol allow you to obtain information about the status of the balance and ways to influence its operation, for example, they allow you to receive weighing results from the balance, control the display, etc.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

## Compatibile con

Bilance ad alta risoluzione in acciaio inox HY10.HRP H  
Bilance multifunzione HY 10  
Bilance multifunzione in acciaio inox HY10 H

Bilance ad alta risoluzione HY10.HRP  
Bilance per controllo PGC HY10.H  
Terminale di pesata PUE HY10