




More information on the website
radwag.com/en/info,w1,XVL

RES Radwag Extended SI Module (PUE HX7)

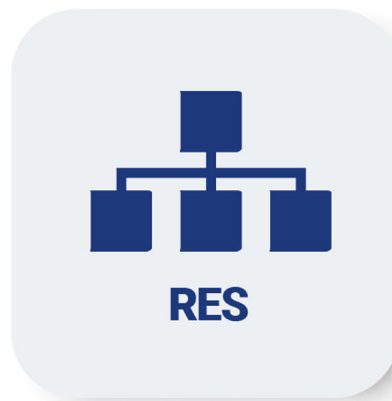

The drawings, photos and graphics used are for illustrative purposes only.

Overview

Character communication protocol is designed for communication between RADWAG balance and external device via RS232, Ethernet or Wi-Fi* interfaces. The protocol consists of commands sent from the external device to the balance and responses sent from the balance to the device. Responses are sent from the balance each time a command is received as a response to the command. The commands that make up the communication protocol allow you to obtain information about the status of the balance and ways to influence its operation, for example, they allow you to receive weighing results from the balance, control the display, etc.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Compatible with

HX7 H Stainless steel Multifunctional Scale
 HX7.4N H Multifunctional Stainless Steel Ramp Scale
 HX7.4C Multifunctional Platform Scale
 HX7 HR Multifunctional Scale
 HX7.4P2 H Multifunctional Stainless Steel Beam Scales
 HX7.4N H.LD Multifunctional Stainless Steel Ramp Scale
 HX7.4P H Multifunctional Stainless Steel Pallet Scales

HX7 Multifunctional Scale
 HX7.4 H/Z Multifunctional Stainless Steel Platform Scale, pit version
 HX7.4 H Multifunctional Stainless Steel Platform Scale
 HX7.4P2 Multifunctional Beam Scales
 PUE HX7 Weighing Terminal
 HX7.4P Multifunctional pallet scales