




More information on the website  
[radwag.com/us/info,w1,YAK](http://radwag.com/us/info,w1,YAK)

# AS 310.5Y Analytical Balance

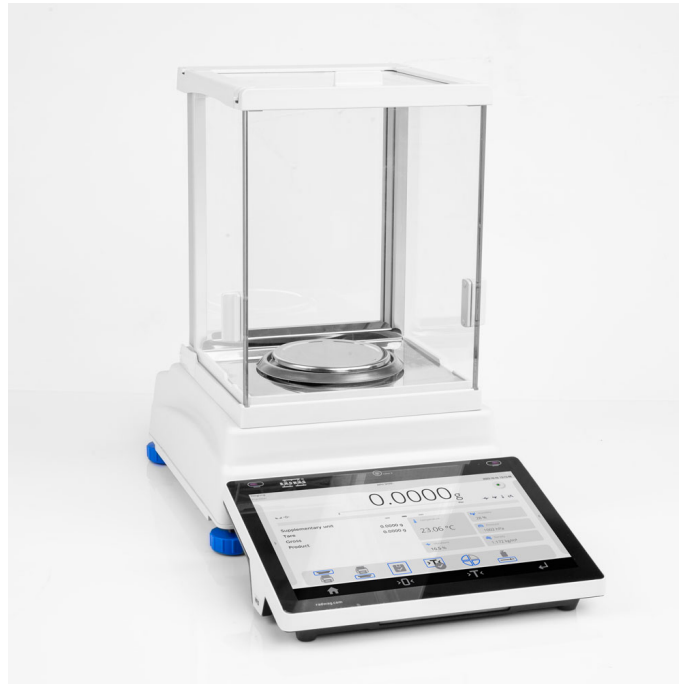

The drawings, photos and graphics used are for illustrative purposes only.

## Functions

-  Autotest
-  Dosing
-  Percent Weighing
-  Parts counting
-  Peak hold
-  Formulation
-  Newton unit measurement
-  Statistics
-  Checkweighing
-  IR sensors
-  GLP Procedures
-  Animal weighing
-  Pipettes Calibration
-  Air density correction
-  Density determination
-  Differential weighing
-  Ambient conditions monitoring
-  Statistical Quality Control
-  Packaged Goods Control
-  ALIBI Memory
-  Wi-Fi

## Datasheet

Maximum capacity [Max]	310 g
Minimum load	10 mg
Readability [d]	0,1 mg

Verification unit [e]	1 mg
Tare range	-310 g
Standard repeatability [5% Max]	0,07 mg
Standard repeatability [Max]	0,1 mg
Standard minimum weight (USP)	140 mg
Standard minimum weight (U=1%, k=2)	14 mg
Permissible repeatability [5% Max]	0,12 mg
Permissible repeatability [Max]	0,15 mg
Linearity	±0,3 mg
Stabilization time	2,5 s
Adjustment	internal (automatic)
OIML Class	I
<b>Physical parameters</b>	
Leveling system	półautomatyczny - LevelSENSING
Display	10" graphic colour touchscreen
Weighing chamber doors	manual
Delivery components	Balance, weighing pan, weighing pan shield, bottom cover, power supply.
Weighing chamber dimensions	190×190×227 mm
Weighing pan dimensions	ø100 mm
Packaging dimensions	600×400×550 mm
Net weight	7,3 kg
Gross weight	9,3 kg
<b>Construction</b>	
Protection class	IP 43
<b>Database capacity</b>	
Database capacity	7
<b>Features of use</b>	
Touch-free operation	2 IR Sensors
<b>Communication interface</b>	
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
<b>Power supply</b>	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
Power consumption max.	4 W
<b>Operating temperature</b>	
Operating temperature	+10 ÷ +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% ÷ 80%

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Extra payment for verification



## Accessories

Antivibration tables  
Holders for laboratory flasks  
Power Adapters  
RS 232, RS 485 cables  
Cigarette lighter receptacle power supply cables  
Density determination KIT  
Additional modules  
USB cable (scale - printer)  
Professional Weighing Tables  
Protective cover for balances  
Barcode scanners  
Holders for test tubes and filters

Workstation for pipettes calibration  
THBR 2.0 System - Ambient Conditions Monitoring  
Weighing dishes  
Antistatic ionizer  
Receipt Printer  
Fingerprint Reader  
RS 232, RS 485 cables  
Protective cover for balances  
Under-pan weighing  
RS 232 cables (scale - printer)  
RS 232 – RS 485 Converter

## Software

- E2R Weighing [WX-010-0099]
- RAD Key [WX-010-0005]
- RADWAG Remote Desktop [WX-010-0107]
- RADWAG Development Studio [WX-010-0104]

- E2R Weighing Records [WX-010-0038]
- Label Editor R02 [WX-010-0094]
- Scale Editor - EWAG 2.1 [WX-010-0173]

## Device dimensions

