



More information on the website  
[radwag.com/en/info,w1,YPP](http://radwag.com/en/info,w1,YPP)

# WAY 1.5Y.KO Mass Comparator



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
E1 Calibration Range	500 g ÷ 1 kg
E2 Calibration Range	100 g ÷ 1 kg
F1 Calibration Range	10 g ÷ 1 kg
F2 Calibration Range	1 g ÷ 1 kg
M1 Calibration Range	1 g ÷ 1 kg
M2 Calibration Range	1 g ÷ 1 kg
Maximum capacity [Max]	1.02 kg
Readability [d]	0.01 mg
Standard repeatability [5% Max]	0.025 mg
Standard repeatability [Max]	0.03 mg
Permissible repeatability	0.05 mg
Eccentricity (tested load)	1d / 1 mm
Electric compensation range	-10 g ÷ +20 g
Stabilization time	30 s
Adjustment	internal

Physical parameters	
Display	10" graphic colour touchscreen
Weighing pan dimensions	ø60 mm
Weighing device dimensions	385×215×525 mm
Controlling device dimensions	249×170×72 mm
Anti-draft chamber dimensions	660×470×700 mm
Packaging dimensions	860×800×550 mm
Chamber packaging size	820×850×630 mm
Net weight	38 kg
Gross weight	58 kg
Supplementary weights internal	automatic
Supplementary weights external	50 g, 30 g, 2× 10 g
Communication interface	
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Environmental conditions	
Operating temperature	+15 ÷ +30 °C
Operating temperature change rate	±0.5°C/12h (±0.3°C/4h)
Relative humidity	40% ÷ 60%
Relative humidity change rate	± 3 % / 4 h

**Repeatability** is expressed as a standard deviation determined for 6 ABBA cycles. Standard deviation is experimentally determined under ambient conditions for calibration of F2 class mass standards specified in OIML R111 (Table C.1.) document.

**Eccentricity (tested load)** – suspended self-centring weighing pan (available as an option): 0 mg

\* **Eccentricity (tested load):** 1 d / mm

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories

Suspended Self-Centring Weighing Pan for WAY 5Y.KO Manual Mass	Label Printers
Comparator	THBR 2.0 System - Ambient Conditions Monitoring
RFID Tags	Receipt Printer
Antivibration Tables	Fingerprint Reader
Additional modules	RS 232, RS 485 cables
Protective cover for balances	RS 232 cables (scale - printer)
Barcode scanners	
RS 232, RS 485 cables	

## Software

- RAD Key [WX-010-0005]
- RMCS System Network Management of Calibration Process [WX-010-0048]
- RMCS Lite [WX-010-0164]


## Device dimensions



WAY 5.5Y.KO



WAY 100.5Y.KO

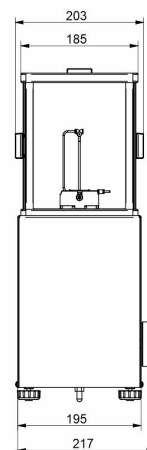

WAY 1200.5Y.KO



WAY 5100.5Y.KO