



C32.15.D2 Multifunctional Scale, C32.0.6.D2 Multifunctional Scale, C32.6.D2 Multifunctional Scale, C32.1,5.D2 Multifunctional Scale, C32.3.D2 Multifunctional Scale

More information on the website
radwag.com/en/info,w1,l36



C32.15.D2 Multifunctional Scale
C32.6.D2 Multifunctional Scale
C32.3.D2 Multifunctional Scale

C32.0.6.D2 Multifunctional Scale
C32.1,5.D2 Multifunctional Scale

The drawings, photos and graphics used are for illustrative purposes only.

Functions



Labelling



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Newton unit measurement



Statistics



IR sensors



Under-pan weighing



GLP Procedures



Replaceable unit



ALIBI Memory

Datasheet

	C32.0.6.D2 Multifunctional Scale	C32.1,5.D2 Multifunctional Scale	C32.3.D2 Multifunctional Scale
Metrological parameters			
Maximum capacity [Max]	0,6 kg	1,5 kg	3 kg
Minimum load	4 g	10 g	20 g
Readability [d]	0,2 g	0,5 g	1 g
Tare range	-0,6 kg	-1,5 kg	-3 kg
Max readability for non-verified scale	0,02 g	0,05 g	0,1 g
OIML Class	III	III	III
Physical parameters			
Display	5" graphic colour	5" graphic colour	5" graphic colour
Weighing pan dimensions	195×195 mm	195×195 mm	195×195 mm
Packaging dimensions	530×310×150 mm	530×310×150 mm	530×310×150 mm
Net weight	3,4 kg	3,4 kg	3,4 kg
Gross weight	4 kg	4,3 kg	4 kg
Construction			
Protection class	IP 43	IP 43	IP 43
Housing	ABS plastic	ABS plastic	ABS plastic
Weighing pan material	Stainless steel AISI304	Stainless steel AISI304	Stainless steel AISI304
Communication interface			
Communication interface	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters			
Power supply	100 – 240 V AC 50/60 Hz	100 – 240 V AC 50/60 Hz	100 – 240 V AC 50/60 Hz
Power consumption max.	10 W	10 W	10 W
Optional power supply	internal rechargeable battery	internal rechargeable battery	internal rechargeable battery
Operation time on batteries	operation time up to 5 h	operation time up to 5 h	operation time up to 5 h
Environmental conditions			
Operating temperature	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C

Datasheet

	C32.6.D2 Multifunctional Scale	C32.15.D2 Multifunctional Scale
Metrological parameters		
Maximum capacity [Max]	6 kg	15 kg
Minimum load	40 g	100 g
Readability [d]	2 g	5 g
Tare range	-6 kg	-15 kg
Max readability for non-verified scale	0,2 g	0,5 g
OIML Class	III	III
Physical parameters		
Display	5" graphic colour	5" graphic colour
Weighing pan dimensions	195×195 mm	195×195 mm
Packaging dimensions	530×310×150 mm	530×310×150 mm
Net weight	3,4 kg	3,4 kg
Gross weight	4,5 kg	4,3 kg
Construction		
Protection class	IP 43	IP 43
Housing	ABS plastic	ABS plastic
Weighing pan material	Stainless steel AISI304	Stainless steel AISI304
Communication interface		
Communication interface	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters		
Power supply	100 – 240 V AC 50/60 Hz	100 – 240 V AC 50/60 Hz
Power consumption max.	10 W	10 W
Optional power supply	internal rechargeable battery	internal rechargeable battery
Operation time on batteries	operation time up to 5 h	operation time up to 5 h
Environmental conditions		
Operating temperature	-10 ÷ +40 °C	-10 ÷ +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Extra payment for verification



Accessories

Displays
 Power Adapters
 RS 232 cables (scale - printer)
 Cigarette lighter receptacle power supply cables
 Barcode scanners
 RS 232, RS 485 cables
 Label Printers
 Displays

Displays
 Keypad, external switches
 Stands, wall mounting kits and mounting brackets
 Additional modules
 Receipt Printer
 RS 232, RS 485 cables
 RS 232 cables (scale - printer)




Software

E2R System
 Label Editor R02
 R-LAB

RAD-KEY
 Alibi Reader
 Scales Editor 2.1





Device dimensions

C32.15.D2 Multifunctional Scale, C32.0.6.D2 Multifunctional Scale, C32.6.D2 Multifunctional Scale, C32.1,5.D2 Multifunctional Scale, C32.3.D2 Multifunctional Scale

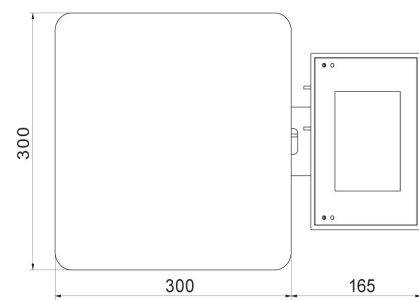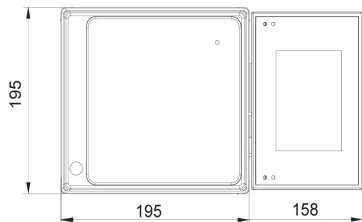

C32.D2

C32.F1.R

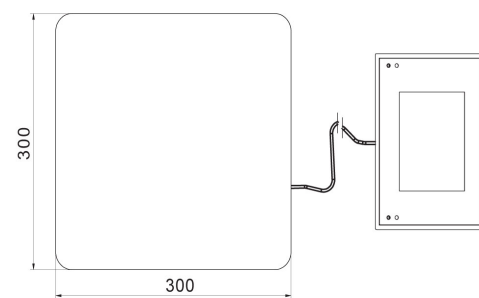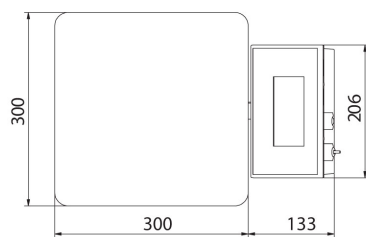

C32.F1.M

C32.F1.K