



Rama do fundamentowania / Pit installation frame / Einbaurahmen

symbol ramy / frame No. / Rahmensymbol	A [mm]	B [mm]	D [mm]	E [mm]	H [mm]	L [mm]	masa / mass / Masse
PLC3-4-R-1500-C6	800	800	700	700	118	50	20kg
PLC3-4-R-1500-C7	1000	1000	900	900	118	50	23kg
PLC3-4-R-3000-C7-8.1	1000	1250	900	1150	118	50	25kg
PLC3-4-R-3000-C8	1200	1200	1100	1100	118	50	26kg
PLC3-4-R-3000-C8-9	1200	1500	1100	1400	118	50	28kg
PLC3-4-R-3000-C8.1	1250	1250	1150	1150	118	50	27kg
PLC3-4-R-3000-C8.1-9	1250	1500	1150	1400	118	50	29kg
PLC3-4-R-3000-C9	1500	1500	1400	1400	118	50	30kg
PLC3-4-R-3000-C10	1500	2000	1400	1900	118	50	34kg
PLC3-4-R-3000-C11	2000	2000	1900	1900	118	50	38kg
PLC3-4-R-6000-C9	1500	1500	1380	1380	162	80	48kg
PLC3-4-R-6000-C10	1500	2000	1380	1880	162	80	55kg
PLC3-4-R-6000-C11	2000	2000	1880	1880	162	80	60kg

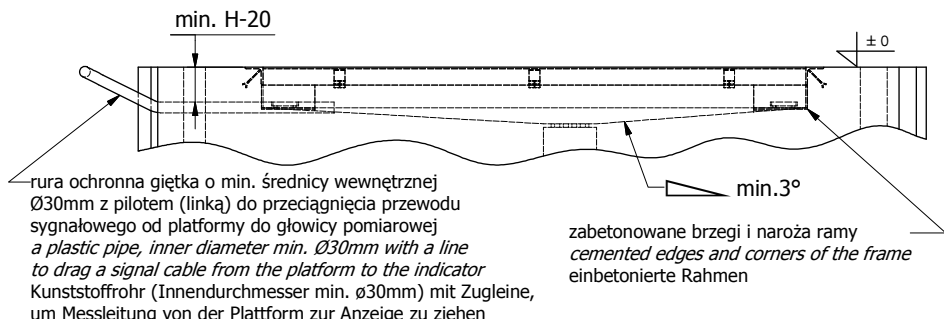

zabetonowane brzozy i naroża ramy
cemented edges and corners of the frame
 einbetonierte Rahmen

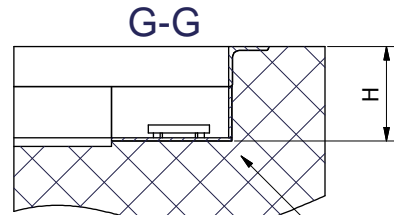

podłoże betonowe (grubość $\sim 120\text{mm}$)
dopasowane do nośności wagi
concrete base (thickness $\sim 120\text{mm}$)
adjusted to the load capacity of the scale
 Die Stärke der Betonbodenplatte unter der Waage sollte min. 120 mm betragen

