



# Stainless Steel HX7.4.H/Z

## 4 Load Cell Platform Scale, Pit Version

Measurements of large loads in moist environment  
Installation in the ground and access to scale design



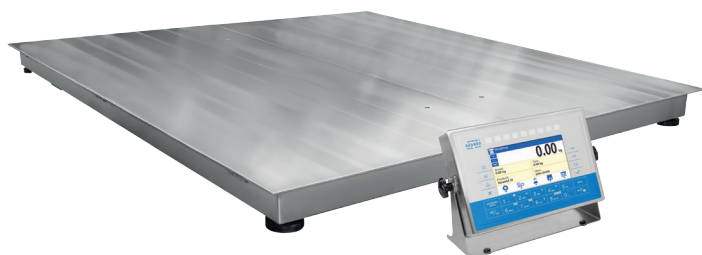








Opened weighing pan



Bar graph is a graphic visualisation of current mass

HX7.4.300.H7/Z

### Functions

-  Parts counting
-  Percent weighing
-  Alibi memory
-  Databases
-  Formulations
-  Dosing
-  In-built battery
-  Replaceable units
-  Multilingual menu

### Features

#### Precise weighing results in industrial conditions

Mass measurement carried out using 4 load cells guarantees weighing accuracy regardless positioning of the load on the platform. The scale ensures precise and fast mass measurement in industrial conditions.

#### Reliability and Safety

Robust platform made of stainless steel allows to operate large loads, and the weighing pan made of tear plate prevents potential slips.

#### Versatility of use

HX7.4.H/Z scale can be applied in various industry areas, apart from standard weighing processes it allows to carry out parts counting, dosing, formulations.

#### Compatibility with PUE HX7 indicator

The scale can be operated via advanced PUE HX7 terminal with a hermetic stainless steel housing. The terminal features 7" colour graphic LCD and a membrane keyboard.

#### Communication Interfaces

The terminal is equipped with RS 322, RS 485, USB, Ethernet, digital inputs/ outputs and analog output. This enables cooperation with external devices: barcode scanners, printers, external displays, control buttons, light signalling towers, other controlling/signalling devices, systems for automatic process control and superior IT systems. It is possible due to the implemented complex character-based communication protocol.

#### Diodes

Diode bar graph takes top part of the operation panel, it consists of 9 red and green diode fields. Bar graph is a graphic visualisation informing on current net weight of a product in comparison with the scale range. The terminal features 3 working modes: 'linear', 'weighing thresholds signalling' and 'checkweighing'. The bar graph significantly increases the comfort of terminal operation during piecework in food industry when fast and unambiguous presentation of product mass deviation in comparison with the declared min and max values is crucial.

#### Uninterrupted Operation due to an Internal battery

Integrated battery of the weighing indicator enable several hours long mobile operation.

#### Ergonomics and Comfort of Operation

With use of a long cable it is possible to locate the indicator in a place facilitating convenient operation. An additional accessory enables placing it on a stand or mounting to the wall.

#### Customizable Instrument

Numerous variants of weighing pan dimensions and broad range of maximum capacities enable selecting the best weighing instrument suiting specific requirements and needs.

## Technical Specifications

	HX7.4.150.H6/Z	HX7.4.300.H6/Z	HX7.4.600.H6/Z*
<b>Maximum capacity [Max]</b>	150 kg	300 kg	600 kg
<b>Minimum capacity</b>	1 kg	2 kg	4 kg
<b>Readability [d]</b>	50 g	100 g	200 g
<b>Max readability for non-verified scale</b>	20 g	20 g	50 g
<b>Verification unit [e]</b>	50 g	100 g	200 g
<b>Tare range</b>	-150 kg	-300 kg	-600 kg
<b>Verification</b>	Yes	Yes	Yes
<b>OIML class</b>	III	III	III
<b>Max number of platforms</b>	2	2	2
<b>Platform material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Weighing pan material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Indicator fastening</b>	3 m cable	3 m cable	3 m cable
<b>Display</b>	7" graphic display	7" graphic display	7" graphic display
<b>Keyboard</b>	membrane, 22-key	membrane, 22-key	membrane, 22-key
<b>Indicator type</b>	PUE HX7	PUE HX7	PUE HX7
<b>Ingress protection - platform</b>	IP 68	IP 68	IP 68
<b>Ingress protection - indicator</b>	IP 66/68	IP 66/68	IP 66/68
<b>RS232</b>	1	1	1
<b>USB</b>	1	1	1
<b>Ethernet</b>	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
<b>IN / OUT</b>	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
<b>RS232 **</b>	1	1	1
<b>RS485 **</b>	1	1	1
<b>USB **</b>	1	1	1
<b>IN / OUT **</b>	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
<b>AN module **</b>	1x 4-20mA, 20-1V	1x 4-20mA, 20-2V	1x 4-20mA, 50-4V
<b>Power supply</b>	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
<b>Optional power supply **</b>	12-24 V DC	12-24 V DC	12-24 V DC
<b>Max Power consumption</b>	25 W	25 W	25 W
<b>Operating temperature</b>	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
<b>Relative humidity ***</b>	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
<b>Transport and storage temperature</b>	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
<b>Weighing pan dimensions</b>	800 × 800 mm	800 × 800 mm	800 × 800 mm
<b>Net weight ****</b>	75.7 kg	75.7 kg	75.7 kg
<b>Gross weight ****</b>	105.5 kg	105.5 kg	105.5 kg
<b>Packaging dimensions</b>	100 × 100 × 65 cm	100 × 100 × 65 cm	100 × 100 × 65 cm
<b>Frame weight</b>	16 kg	16 kg	16 kg

\* possibility to make the device a dual range weighing model

\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform

	HX7.4.150.H7/Z	HX7.4.300.H7/Z	HX7.4.600.H7/Z*
<b>Maximum capacity [Max]</b>	150 kg	300 kg	600 kg
<b>Minimum capacity</b>	1 kg	2 kg	4 kg
<b>Readability [d]</b>	50 g	100 g	200 g
<b>Max readability for non-verified scale</b>	20 g	20 g	50 g
<b>Verification unit [e]</b>	50 g	100 g	200 g
<b>Tare range</b>	-150 kg	-300 kg	-600 kg
<b>Verification</b>	Yes	Yes	Yes
<b>OIML class</b>	III	III	III
<b>Max number of platforms</b>	2	2	2
<b>Platform material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Weighing pan material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Indicator fastening</b>	3 m cable	3 m cable	3 m cable
<b>Display</b>	7" graphic display	7" graphic display	7" graphic display
<b>Keyboard</b>	membrane, 22-key	membrane, 22-key	membrane, 22-key
<b>Indicator type</b>	PUE HX7	PUE HX7	PUE HX7
<b>Ingress protection - platform</b>	IP 68	IP 68	IP 68
<b>Ingress protection - indicator</b>	IP 66/68	IP 66/68	IP 66/68
<b>RS232</b>	1	1	1
<b>USB</b>	1	1	1
<b>Ethernet</b>	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
<b>IN / OUT</b>	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
<b>RS232 **</b>	1	1	1
<b>RS485 **</b>	1	1	1
<b>USB **</b>	1	1	1
<b>IN / OUT **</b>	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
<b>AN module **</b>	1x 4-20mA, 20-1V	1x 4-20mA, 20-2V	1x 4-20mA, 50-4V
<b>Power supply</b>	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
<b>Optional power supply **</b>	12-24 V DC	12-24 V DC	12-24 V DC
<b>Max Power consumption</b>	25 W	25 W	25 W
<b>Operating temperature</b>	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
<b>Relative humidity ***</b>	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
<b>Transport and storage temperature</b>	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
<b>Weighing pan dimensions</b>	1000 × 1000 mm	1000 × 1000 mm	1000 × 1000 mm
<b>Net weight ****</b>	102.7 kg	102.7 kg	102.7 kg
<b>Gross weight ****</b>	135.5 kg	135.5 kg	135.5 kg
<b>Packaging dimensions</b>	120 × 120 × 65 cm	120 × 120 × 65 cm	120 × 120 × 65 cm
<b>Frame weight</b>	18 kg	18 kg	18 kg

\* possibility to make the device a dual range weighing model

\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform

	HX7.4.1500.H7/Z*	HX7.4.300.H8/Z	HX7.4.600.H8/Z*
Maximum capacity [Max]	1500 kg	300 kg	600 kg
Minimum capacity	10 kg	2 kg	4 kg
Readability [d]	500 g	100 g	200 g
Max readability for non-verified scale	100 g	20 g	50 g
Verification unit [e]	500 g	100 g	200 g
Tare range	-1500 kg	-300 kg	-600 kg
Verification	Yes	Yes	Yes
OIML class	III	III	III
Max number of platforms	2	2	2
Platform material	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
Weighing pan material	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
Indicator fastening	3 m cable	3 m cable	3 m cable
Display	7" graphic display	7" graphic display	7" graphic display
Keyboard	membrane, 22-key	membrane, 22-key	membrane, 22-key
Indicator type	PUE HX7	PUE HX7	PUE HX7
Ingress protection - platform	IP 68	IP 68	IP 68
Ingress protection - indicator	IP 66/68	IP 66/68	IP 66/68
RS232	1	1	1
USB	1	1	1
Ethernet	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
IN / OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
RS232 **	1	1	1
RS485 **	1	1	1
USB **	1	1	1
IN / OUT **	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
AN module **	1x 4-20mA, 100-10V	1x 4-20mA, 20-2V	1x 4-20mA, 50-4V
Power supply	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
Optional power supply **	12-24 V DC	12-24 V DC	12-24 V DC
Max Power consumption	25 W	25 W	25 W
Operating temperature	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
Relative humidity ***	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
Transport and storage temperature	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
Weighing pan dimensions	1000 × 1000 mm	1200 × 1200 mm	1200 × 1200 mm
Net weight ****	112.7 kg	144.7 kg	144.7 kg
Gross weight ****	145.5 kg	185.5 kg	185.5 kg
Packaging dimensions	120 × 120 × 65 cm	140 × 140 × 65 cm	140 × 140 × 65 cm
Frame weight	18 kg	20 kg	20 kg

\* possibility to make the device a dual range weighing model

\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform

	HX7.4.600.H8/9/Z*	HX7.4.1500.H8/9/Z*	HX7.4.3000.H8/9/Z*
<b>Maximum capacity [Max]</b>	600 kg	1500 kg	3000 kg
<b>Minimum capacity</b>	4 kg	10 kg	20 kg
<b>Readability [d]</b>	200 g	500 g	1000 g
<b>Max readability for non-verified scale</b>	50 g	100 g	200 g
<b>Verification unit [e]</b>	200 g	500 g	1000 g
<b>Tare range</b>	-600 kg	-1500 kg	-3000 kg
<b>Verification</b>	Yes	Yes	Yes
<b>OIML class</b>	III	III	III
<b>Max number of platforms</b>	2	2	2
<b>Platform material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Weighing pan material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Indicator fastening</b>	3 m cable	3 m cable	3 m cable
<b>Display</b>	7" graphic display	7" graphic display	7" graphic display
<b>Keyboard</b>	membrane, 22-key	membrane, 22-key	membrane, 22-key
<b>Indicator type</b>	PUE HX7	PUE HX7	PUE HX7
<b>Ingress protection - platform</b>	IP 68	IP 68	IP 68
<b>Ingress protection - indicator</b>	IP 66/68	IP 66/68	IP 66/68
<b>RS232</b>	1	1	1
<b>USB</b>	1	1	1
<b>Ethernet</b>	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
<b>IN / OUT</b>	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
<b>RS232 **</b>	1	1	1
<b>RS485 **</b>	1	1	1
<b>USB **</b>	1	1	1
<b>IN / OUT **</b>	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
<b>AN module **</b>	1x 4-20mA, 50-4V	1x 4-20mA, 100-10V	1x 4-20mA, 200-20V
<b>Power supply</b>	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
<b>Optional power supply **</b>	12-24 V DC	12-24 V DC	12-24 V DC
<b>Max Power consumption</b>	25 W	25 W	25 W
<b>Operating temperature</b>	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
<b>Relative humidity ***</b>	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
<b>Transport and storage temperature</b>	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
<b>Weighing pan dimensions</b>	1200 × 1500 mm	1200 × 1500 mm	1200 × 1500 mm
<b>Net weight ****</b>	175.7 kg	175.7 kg	187.7 kg
<b>Gross weight ****</b>	225.5 kg	225.5 kg	235.5 kg
<b>Packaging dimensions</b>	170 × 140 × 65 cm	170 × 140 × 65 cm	170 × 140 × 67 cm
<b>Frame weight</b>	21 kg	21 kg	29 kg

\* possibility to make the device a dual range weighing model

\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform

	HX7.4.300.H9/Z	HX7.4.600.H9/Z*	HX7.4.1500.H9/Z*
<b>Maximum capacity [Max]</b>	300 kg	600 kg	1500 kg
<b>Minimum capacity</b>	2 kg	4 kg	10 kg
<b>Readability [d]</b>	100 g	200 g	500 g
<b>Max readability for non-verified scale</b>	50 g	50 g	100 g
<b>Verification unit [e]</b>	100 g	200 g	500 g
<b>Tare range</b>	-300 kg	-600 kg	-1500 kg
<b>Verification</b>	Yes	Yes	Yes
<b>OIML class</b>	III	III	III
<b>Max number of platforms</b>	2	2	2
<b>Platform material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Weighing pan material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Indicator fastening</b>	3 m cable	3 m cable	3 m cable
<b>Display</b>	7" graphic display	7" graphic display	7" graphic display
<b>Keyboard</b>	membrane, 22-key	membrane, 22-key	membrane, 22-key
<b>Indicator type</b>	PUE HX7	PUE HX7	PUE HX7
<b>Ingress protection - platform</b>	IP 68	IP 68	IP 68
<b>Ingress protection - indicator</b>	IP 66/68	IP 66/68	IP 66/68
<b>RS232</b>	1	1	1
<b>USB</b>	1	1	1
<b>Ethernet</b>	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
<b>IN / OUT</b>	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
<b>RS232 **</b>	1	1	1
<b>RS485 **</b>	1	1	1
<b>USB **</b>	1	1	1
<b>IN / OUT **</b>	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
<b>AN module **</b>	1x 4-20mA, 50-2V	1x 4-20mA, 50-4V	1x 4-20mA, 100-10V
<b>Power supply</b>	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
<b>Optional power supply **</b>	12-24 V DC	12-24 V DC	12-24 V DC
<b>Max Power consumption</b>	25 W	25 W	25 W
<b>Operating temperature</b>	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
<b>Relative humidity ***</b>	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
<b>Transport and storage temperature</b>	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
<b>Weighing pan dimensions</b>	1500 × 1500 mm	1500 × 1500 mm	1500 × 1500 mm
<b>Net weight ****</b>	212.7 kg	212.7 kg	212.7 kg
<b>Gross weight ****</b>	255.5 kg	255.5 kg	255.5 kg
<b>Packaging dimensions</b>	170 × 170 × 65 cm	170 × 170 × 65 cm	170 × 170 × 65 cm
<b>Frame weight</b>	23 kg	23 kg	23 kg

\* possibility to make the device a dual range weighing model

\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform

	HX7.4.3000.H9/Z*	HX7.4.6000.H9/Z*	HX7.4.600.H10/Z
<b>Maximum capacity [Max]</b>	3000 kg	6000 kg	600 kg
<b>Minimum capacity</b>	20 kg	40 kg	4 kg
<b>Readability [d]</b>	1000 g	2000 g	200 g
<b>Max readability for non-verified scale</b>	200 g	500 g	50 g
<b>Verification unit [e]</b>	1000 g	2000 g	200 g
<b>Tare range</b>	-3000 kg	-6000 kg	-600 kg
<b>Verification</b>	Yes	Yes	Yes
<b>OIML class</b>	III	III	III
<b>Max number of platforms</b>	2	2	2
<b>Platform material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Weighing pan material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Indicator fastening</b>	3 m cable	3 m cable	3 m cable
<b>Display</b>	7" graphic display	7" graphic display	7" graphic display
<b>Keyboard</b>	membrane, 22-key	membrane, 22-key	membrane, 22-key
<b>Indicator type</b>	PUE HX7	PUE HX7	PUE HX7
<b>Ingress protection - platform</b>	IP 68	IP 68	IP 68
<b>Ingress protection - indicator</b>	IP 66/68	IP 66/68	IP 66/68
<b>RS232</b>	1	1	1
<b>USB</b>	1	1	1
<b>Ethernet</b>	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
<b>IN / OUT</b>	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
<b>RS232 **</b>	1	1	1
<b>RS485 **</b>	1	1	1
<b>USB **</b>	1	1	1
<b>IN / OUT **</b>	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
<b>AN module **</b>	1x 4-20mA, 20-20V	1x 4-20mA, 500-40V	1x 4-20mA, 50-4V
<b>Power supply</b>	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
<b>Optional power supply **</b>	12-24 V DC	12-24 V DC	12-24 V DC
<b>Max Power consumption</b>	25 W	25 W	25 W
<b>Operating temperature</b>	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
<b>Relative humidity ***</b>	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
<b>Transport and storage temperature</b>	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
<b>Weighing pan dimensions</b>	1500 × 1500 mm	1500 × 1500 mm	1500 × 2000 mm
<b>Net weight ****</b>	230.7 kg	316.7 kg	319.7 kg
<b>Gross weight ****</b>	275.5 kg	365.5 kg	375.5 kg
<b>Packaging dimensions</b>	170 × 170 × 67 cm	170 × 170 × 72 cm	220 × 170 × 67 cm
<b>Frame weight</b>	31 kg	31 kg	35 kg

\* possibility to make the device a dual range weighing model

\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform

	HX7.4.1500.H10/Z*	HX7.4.3000.H9/Z*	HX7.4.6000.H10/Z*
<b>Maximum capacity [Max]</b>	1500 kg	3000 kg	6000 kg
<b>Minimum capacity</b>	10 kg	20 kg	40 kg
<b>Readability [d]</b>	500 g	1000 g	2000 g
<b>Max readability for non-verified scale</b>	100 g	200 g	500 g
<b>Verification unit [e]</b>	500 g	1000 g	2000 g
<b>Tare range</b>	-1500 kg	-3000 kg	-6000 kg
<b>Verification</b>	Yes	Yes	Yes
<b>OIML class</b>	III	III	III
<b>Max number of platforms</b>	2	2	2
<b>Platform material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Weighing pan material</b>	AISI304 stainless steel	AISI304 stainless steel	AISI304 stainless steel
<b>Indicator fastening</b>	3 m cable	3 m cable	3 m cable
<b>Display</b>	7" graphic display	7" graphic display	7" graphic display
<b>Keyboard</b>	membrane, 22-key	membrane, 22-key	membrane, 22-key
<b>Indicator type</b>	PUE HX7	PUE HX7	PUE HX7
<b>Ingress protection - platform</b>	IP 68	IP 68	IP 68
<b>Ingress protection - indicator</b>	IP 66/68	IP 66/68	IP 66/68
<b>RS232</b>	1	1	1
<b>USB</b>	1	1	1
<b>Ethernet</b>	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
<b>IN / OUT</b>	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
<b>RS232 **</b>	1	1	1
<b>RS485 **</b>	1	1	1
<b>USB **</b>	1	1	1
<b>IN / OUT **</b>	12 × IN, 12 × OUT	12 × IN, 12 × OUT	12 × IN, 12 × OUT
<b>AN module **</b>	1x 4-20mA, 100-10V	1x 4-20mA, 200-20V	1x 4-20mA, 500-40V
<b>Power supply</b>	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz	100 ÷ 240 V AC 50 ÷ 60 Hz
<b>Optional power supply **</b>	12-24 V DC	12-24 V DC	12-24 V DC
<b>Max Power consumption</b>	25 W	25 W	25 W
<b>Operating temperature</b>	-10 ÷ +40 °C	-10 ÷ +40 °C	-10 ÷ +40 °C
<b>Relative humidity ***</b>	10 ÷ 85%	10 ÷ 85%	10 ÷ 85%
<b>Transport and storage temperature</b>	-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
<b>Weighing pan dimensions</b>	1500 × 2000 mm	1500 × 2000 mm	1500 × 2000 mm
<b>Net weight ****</b>	319.7 kg	319.7 kg	390.7 kg
<b>Gross weight ****</b>	375.5 kg	375.5 kg	445.5 kg
<b>Packaging dimensions</b>	220 × 170 × 67 cm	220 × 170 × 67 cm	220 × 170 × 72 cm
<b>Frame weight</b>	35 kg	35 kg	35 kg

\* possibility to make the device a dual range weighing model


\*\* optional design

\*\*\* non-condensing conditions

\*\*\*\* mass of the packaging containing the PUE HX7 indicator and the platform



# Dimensions

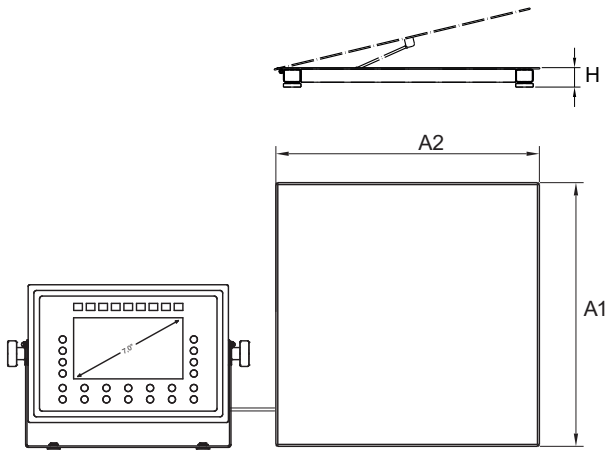


	A1	A2	B
HX7.H6/Z	800	800	88±2
HX7.H7/Z	1000	1000	88±2
HX7.H8/Z	1200	1200	88±2
HX7.H8/Z*	1200	1200	111±2
HX7.H 8/9/Z	1200	1500	88±2
HX7.H8/9Z*	1200	1500	111±2
HX7.H9/Z	1500	1500	88±2
HX7.H9/Z*	1500	1500	111±2
HX7.H10/Z	1500	2000	111±2
HX7.H10/Z**	1500	2000	166±2

dimensions in mm

\* Max ≥ 3000

\*\* Max ≥ 6000

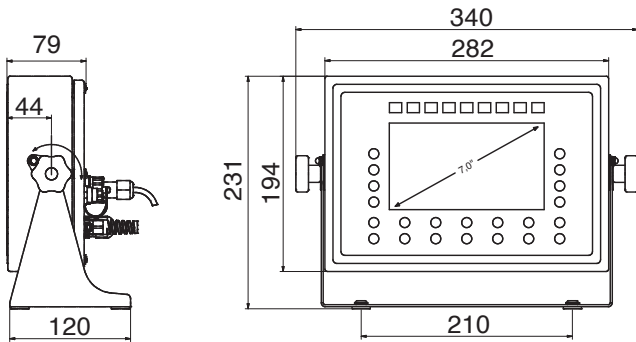

PUE HX7

## Accessories

---

### Peripheral Devices

- Epson dot matrix printer
- LCD – WD-4/3 display (backlit)
- WWG-2/3 large-size display

### Cables, Converters

- PT0019 2m cable (5, 10m optionally) – for Citizen and Epson printers
- PT0022 2m cable (5, 10m optionally) – for ZEBRA printers (later models)
- PT0232 2m cable (5, 10m optionally) – for ZEBRA (older models), INTERMEC and ELTRON printers
- PT0020 2m cable (5, 10m optionally) – for computer

- PT0087 cable (M12 4P) 1.7m – for USB printer
- PT0238 1.7m cable – for printer (A-B)
- PT0084 (M12 4P) 1.7m cable – for USB adapter
- PT0383 2m cable (5, 10m optionally) – for RS485
- PT0256 2m cable (5, 10m optionally) – for IN/OUT

### Remaining Accessories

- stands for indicators

## Dedicated Software

---

### R-LAB

- collecting measurements
- carrying out statistical analysis of measurements
- customized graphs and reports

### Label Editor R02

- designing label templates
- sending graphics and fonts to label printers
- printing label templates using connected printers

### E2R Weighing Records

- complete, automated databases synchronization
- fully supported processes of labelling and parts counting
- record of weighings, weighings archiving
- basic and advanced (with graphs) reports

### RAD KEY

- Establishing cooperation between a weighing instrument and a computer

### LabView Driver

- operation of RADWAG balances in LabView environment

### R.Barcode

- The basic function software is presentation of the data sent by barcode scanners connected to PC via USB or RS232

### Radwag Development Studio

- presentation of functions (and subfunctions) of communication protocol (Common Communication Protocol)
- possibility of connection with weighing equipment on which each function is carried out,
- library with mass control, contained within the development environment
- complete documentation of the communication protocol
- set of user manuals for different solutions addressed for programmers employed in companies using RADWAG-manufactured weighing equipment

### RADWAG Connect

- establishing communication with all balances, scales and weighing modules using Common Communication Protocol
- communication via local network,
- support of basic functions
- auto searching for devices
- connecting with few devices simultaneously, swapping between them
- clear list of connected platforms
- record of measurements in the program,
- export of carried out measurements to CSV file,
- work performed using freely selected device with Windows 10