



More information on the website
radwag.com/en/info,w1,46B

C32.150.C2.K Multifunctional Scale



The drawings, photos and graphics used are for illustrative purposes only.

Functions



Labelling



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Newton unit
measurement



Statistics



IR sensors



Under-pan weighing



GLP Procedures



Replaceable unit



ALIBI Memory

Datasheet

Metrological parameters	
Maximum capacity [Max]	150 kg
Minimum load	1 kg
Readability [d]	50 g
Tare range	-150 kg
Max readability for non-verified scale	5 g
OIML Class	III

Physical parameters		
Display		5" graphic colour
Weighing pan dimensions		500×400 mm
Packaging dimensions		720×620×210 mm
Net weight		11.1 kg
Gross weight		13.5 kg
Cable length		2.5 m
Construction		
Protection class		IP 65 construction, IP 43 indicator
Construction		mild steel St3S
Weighing pan material		Stainless steel AISI304
Communication interface		
Communication interface		2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters		
Power supply		100 – 240 V AC 50/60 Hz
Power consumption max.		10 W
Optional power supply		internal rechargeable battery
Operation time on batteries		operation time up to 5 h
Environmental conditions		
Operating temperature		-10 ÷ +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Extra payment for verification



Accessories

Displays
Power Adapters
RS 232 cables (scale - printer)
Cigarette lighter receptacle power supply cables
Barcode scanners
RS 232, RS 485 cables
Label Printers
Displays



Displays
Keypad, external switches
Stands, wall mounting kits and mounting brackets
Additional modules
Receipt Printer
RS 232, RS 485 cables
RS 232 cables (scale - printer)

Software



- E2R Weighing [WX-010-0099]
- RAD Key [WX-010-0005]
- Alibi Reader [WX-010-0114]
- Scale Editor 2.1 [WX-010-0173]

- E2R Weighing Records [WX-010-0038]
- Label Editor R02 [WX-010-0094]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]


Device dimensions

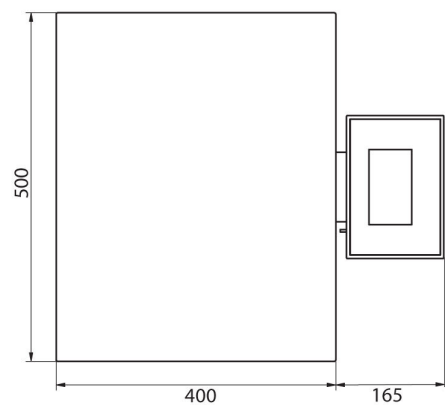

C32.C2.R

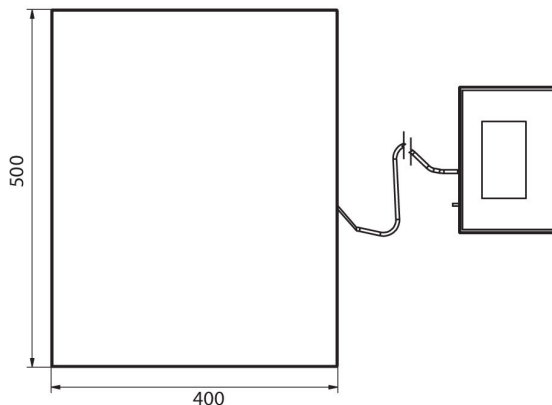

C32.C2.K

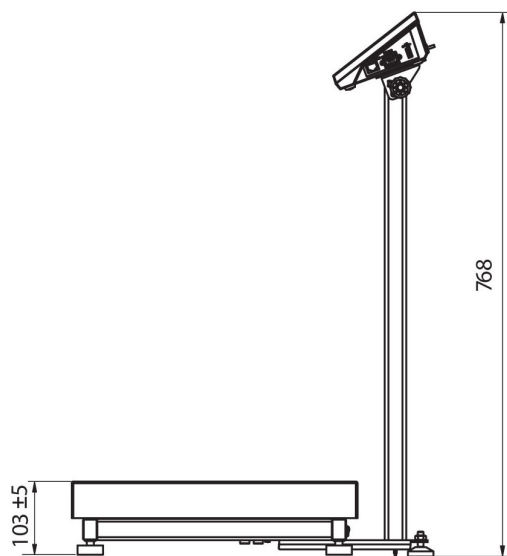

C32.C2.M

