radwag.com

PS 1000.X7 □□□□

WL-226-0010

More information on the website
radwag.com/ja/info,w1,X9B

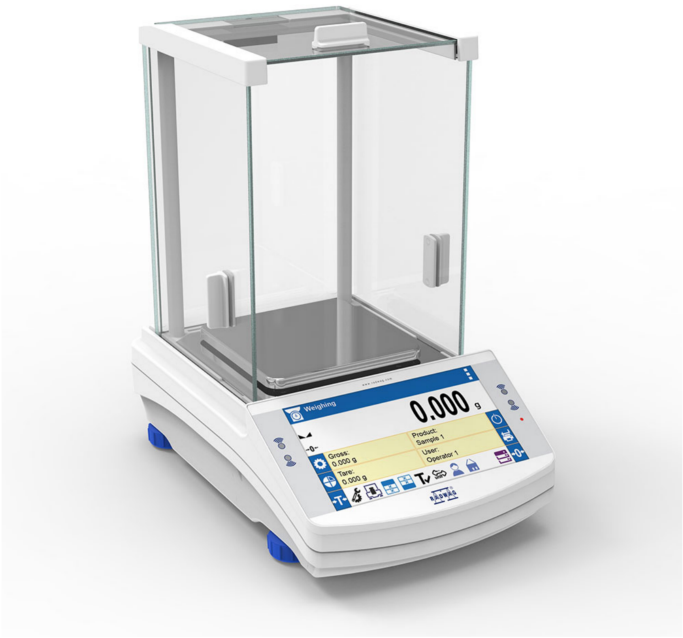

The drawings, photos and graphics used are for illustrative purposes only.

□□

- Autotest
- Dosing
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Peak hold
- Formulation
- Newton unit measurement
- Statistics
- Checkweighing
- IR sensors
- Under-pan weighing
- GLP Procedures
- Animal weighing
- Density determination
- Ambient conditions monitoring
- Replaceable unit
- Statistical Quality Control
- ALIBI Memory
- Mass for titrator
- Wi-Fi

□□□□□□

計測パラメータ	
最大ひょう量 [Max]	1000 g
最小荷重	20 mg

[redacted]	
[redacted] [d]	1 mg
[redacted] [e]	10 mg
[redacted]	-1000 g
[redacted] [5% Max]	0,5 mg
[redacted] [Max]	1,5 mg
[redacted] (USP)	1 g
[redacted] (U=1%, k=2)	0,1 g
[redacted]	±3 mg
[redacted]	2 s
[redacted]	[redacted] ([redacted])
OIML[redacted]	II
[redacted]	2×10^{-6}/°C×Rt
[redacted]	
[redacted]	[redacted]
[redacted]	7" [redacted] + [redacted] [redacted]
[redacted]	, , , ×1, ×3, .
[redacted]	128×128 mm
[redacted]	545×455×575 mm
[redacted]	4,01 kg
[redacted]	7,5 kg
[redacted]	
[redacted]	IP 43
[redacted]	
[redacted]	([redacted], [redacted], [redacted], [redacted], [redacted], [redacted], [redacted], [redacted], [redacted])
[redacted]	
[redacted]	[redacted]
[redacted]	
[redacted]	2×RS232[1], USB-A, USB-B, Ethernet, Wi-Fi
[redacted]	
[redacted]	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A : 12 – 15V DC 0,8A max
[redacted]	4 W
[redacted]	
[redacted]	+10 – +40 °C
[redacted] - [redacted] [redacted]	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
[redacted]	40% – 80%

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Additional fee for verification

アクセサリ **(Additional Fee)**

天秤保管ケース
防振台
電源アダプタ
シガーライターソケット電源ケーブル
USB cable (はかり - プリンタ)
粒状体密度測定キット
バーコードスキャナ
128×128 mm計量皿付き天びん用防風チャンバー
RS 232 /RS 485 ケーブル
THBR 2.0 システム - システム - 周囲条件のモニター
ディスプレイ
天秤用保護カバー
レシートプリンタ
RS 232 /RS 485 ケーブル
追加モジュール
底部吊り下げ計量
RS 232 ケーブル (はかり - プリンタ)
RS 232 – RS 485 コンバータ

ソフトウェア **(Additional Fee)**

- [WX-010-0005]
- [WX-010-0080]
- [WX-010-0104]
- [WX-010-0114]
- [WX-010-0173]

デバイスの寸法