



More information on the website  
[radwag.com/us/info,w1,DF9](http://radwag.com/us/info,w1,DF9)

# PM01.EX-2 intrinsically safe power supply intended for EX scale



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Physical parameters	
Cable length	10 m
Device dimensions	216×174×64 mm
Construction	
Protection class	IP 66 / 68
Housing	Stainless steel
ATEX Certification	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Working in zones	-
Power supply	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	15 W
Operating conditions	
Operating temperature	-20 – +40 °C
Storage temperature	-20 – +60 °C
Relative humidity	10% – 85% RH no condensation






## Compatible with

HX5.EX-1.4P2 H Stainless steel Beam Scales  
HX5.EX-1 HR Stainless Steel 1-Load-Cell Platform Scales  
HX5.EX-1.4P2 C Beam Scales  
HX5.EX-1.4N Stainless Steel Ramp Scales  
HX5.EX-1.4 C 4-Load-Cell Platform Scales  
HX5.EX-1.4P H Stainless steel pallet scales

HX5.EX-1.4 H/Z Stainless steel platform scales, pit version  
HX5.EX-1 C 1 Load Cell Platform Scales  
HX5.EX-1 H Waterproof Platform Scales  
PUE HX5.EX Weighing Terminal  
HX5.EX-1.4 H Stainless Steel 4-Load-Cell Platform Scales  
HX5.EX-1.4P C Pallet scales

## Device dimensions

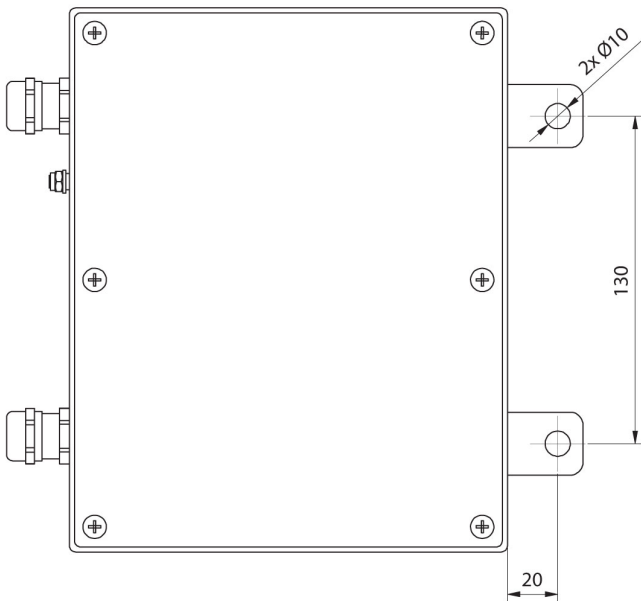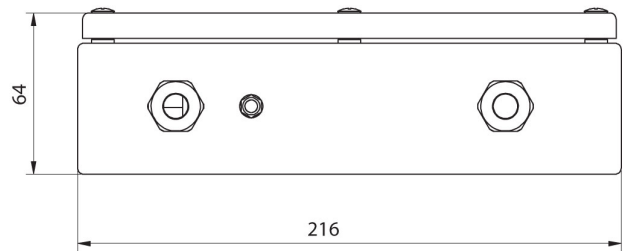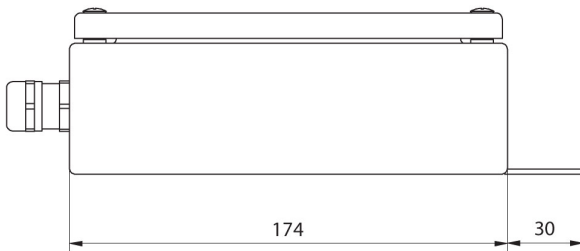

PM01.EX