




PS 200/2000.5Y Precision Balance, PS 360.5Y Precision Balance, PS 3000.5Y Precision Balance, PS 600.5Y Precision Balance, PS 1000.5Y Precision Balance, PS 750.5Y Precision Balance, PS 210.5Y Precision Balance

More information on the website
radwag.com/en/info,w1,C82

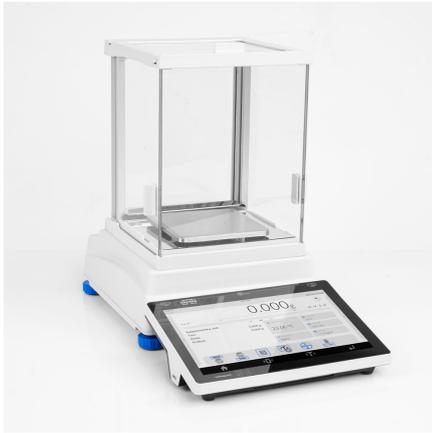

PS 200/2000.5Y Precision Balance
 PS 360.5Y Precision Balance
 PS 3000.5Y Precision Balance
 PS 600.5Y Precision Balance
 PS 1000.5Y Precision Balance
 PS 750.5Y Precision Balance
 PS 210.5Y Precision Balance

The drawings, photos and graphics used are for illustrative purposes only.

Functions



Autotest



Dosing



Percent Weighing



Parts counting



Peak hold



Formulation



Newton unit measurement



Statistics



Checkweighing



IR sensors



GLP Procedures



Animal weighing



Pipettes Calibration



Air density correction



Density determination



Differential weighing



Ambient conditions monitoring



Statistical Quality Control



Packaged Goods Control



ALIBI Memory



Wi-Fi

Datasheet

	PS 200/2000.5Y Precision Balance	PS 210.5Y Precision Balance	PS 360.5Y Precision Balance
Metrological parameters			
Maximum capacity [Max]	200 / 2000 g	210 g	360 g
Minimum load	-	-	-
Readability [d]	1 / 10 mg	1 mg	1 mg
Verification unit [e]	-	-	-
Tare range	-2000 g	-210 g	-360 g
Standard repeatability [5% Max]	0,5 / 5 mg	0,5 mg	0,5 mg
Standard repeatability [Max]	1 / 10 mg	1 mg	1 mg
Standard minimum weight (USP)	1 g	1 g	1 g
Standard minimum weight (U=1%, k=2)	0,1 g	0,1 g	0,1 g
Linearity	±2 / 20 mg	±2 mg	±2 mg
Stabilization time	2 / 1,5 s	2 s	2 s
Adjustment	internal (automatic)	internal (automatic)	internal (automatic)
OIML Class	-	-	-
Physical parameters			
Leveling system	semi-automatic - LevelSENSING	semi-automatic - LevelSENSING	semi-automatic - LevelSENSING
Display	10" graphic colour touchscreen	10" graphic colour touchscreen	10" graphic colour touchscreen
Delivery components	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.
Weighing pan dimensions	128×128 mm	128×128 mm	128×128 mm
Packaging dimensions	600×400×550 mm	600×400×550 mm	600×400×550 mm
Net weight	3,99 kg	3,54 kg	3,99 kg
Gross weight	5,5 kg	5 kg	5 kg
Construction			
Protection class	IP 43	IP 43	IP 43
Components and software			
Database capacity	7	7	7
Features of use			
Touch-free operation	2 IR Sensors	2 IR Sensors	2 IR Sensors
Communication interface			
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
Power consumption	4 W	4 W	4 W
Environmental conditions			
Operating temperature	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% ÷ 80%	40% ÷ 80%	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

Datasheet

	PS 600.5Y Precision Balance	PS 750.5Y Precision Balance	PS 1000.5Y Precision Balance
Metrological parameters			
Maximum capacity [Max]	600 g	750 g	1000 g
Minimum load	-	-	-
Readability [d]	1 mg	1 mg	1 mg
Verification unit [e]	-	-	-
Tare range	-600 g	-750 g	-1000 g
Standard repeatability [5% Max]	0,5 mg	0,5 mg	0,5 mg
Standard repeatability [Max]	1,5 mg	1,5 mg	1,5 mg
Standard minimum weight (USP)	1 g	1 g	1 g
Standard minimum weight (U=1%, k=2)	0,1 g	0,1 g	0,1 g
Linearity	±3 mg	±3 mg	±3 mg
Stabilization time	2 s	2 s	2 s
Adjustment	internal (automatic)	internal (automatic)	internal (automatic)
OIML Class	-	-	-
Physical parameters			
Leveling system	semi-automatic - LevelSENSING	semi-automatic - LevelSENSING	semi-automatic - LevelSENSING
Display	10" graphic colour touchscreen	10" graphic colour touchscreen	10" graphic colour touchscreen
Delivery components	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.
Weighing pan dimensions	128×128 mm	128×128 mm	128×128 mm
Packaging dimensions	600×400×550 mm	600×400×550 mm	600×400×550 mm
Net weight	3,99 kg	3,9 kg	4,01 kg
Gross weight	5,5 kg	5 kg	5 kg
Construction			
Protection class	IP 43	IP 43	IP 43
Components and software			
Database capacity	7	7	7
Features of use			
Touch-free operation	2 IR Sensors	2 IR Sensors	2 IR Sensors
Communication interface			
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
Power consumption	4 W	4 W	4 W
Environmental conditions			
Operating temperature	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% ÷ 80%	40% ÷ 80%	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

Datasheet

PS 3000.5Y Precision Balance	
Metrological parameters	
Maximum capacity [Max]	3000 g
Minimum load	-
Readability [d]	1 mg
Verification unit [e]	-
Tare range	-3000 g
Standard repeatability [5% Max]	0,6 mg
Standard repeatability [Max]	1,5 mg
Standard minimum weight (USP)	1,2 g
Standard minimum weight (U=1%, k=2)	0,12 g
Linearity	±6 mg
Stabilization time	3 s
Adjustment	internal (automatic)
OIML Class	-
Physical parameters	
Leveling system	semi-automatic - LevelSENSING
Display	10" graphic colour touchscreen
Delivery components	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.
Weighing pan dimensions	128x128 mm
Packaging dimensions	600x400x550 mm
Net weight	3,9 kg
Gross weight	5,5 kg
Construction	
Protection class	IP 43
Components and software	
Database capacity	7
Features of use	
Touch-free operation	2 IR Sensors
Communication interface	
Communication interface	2xUSB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
Power consumption	4 W
Environmental conditions	
Operating temperature	+10 ÷ +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Balance Storage Case
Antivibration Tables
Power Adapters
Cigarette lighter receptacle power supply cables
Additional modules
USB cable (scale - printer)
Professional Weighing Tables
Density determination KIT
Protective cover for balances
Barcode scanners

Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan
RS 232, RS 485 cables
THBR 2.0 System - Ambient Conditions Monitoring
Receipt Printer
Fingerprint Reader
RS 232, RS 485 cables
Protective cover for balances
Under-pan weighing
RS 232 cables (scale - printer)
RS 232 – RS 485 Converter

Software

E2R System
Label Editor R02
R-LAB
RADWAG Development Studio

RAD-KEY
RADWAG Remote Desktop
Scales Editor 2.1

Device dimensions

PS 200/2000.5Y Precision Balance, PS 360.5Y Precision Balance, PS 3000.5Y Precision Balance, PS 600.5Y Precision Balance, PS 1000.5Y Precision Balance, PS 750.5Y Precision Balance, PS 210.5Y Precision Balance

