




PUE 7.1.300.HRP.M2.1 High Resolution Scale

More information on the website
radwag.com/en/info,w1,E80

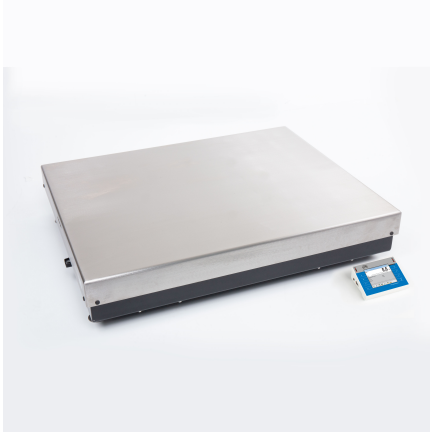

PUE 7.1.300.HRP.M2.1 High Resolution Scale

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

	PUE 7.1.300.HRP.M2.1 High Resolution Scale
Metrological parameters	
Maximum capacity [Max]	300 kg
Minimum load	50 g
Preload range	60 kg
Readability [d]	1 g
Verification unit [e]	10 g
Tare range	-300 kg
Repeatability	3 g
Linearity	±6 g
Stabilization time	3 s
Adjustment	internal (automatic)
OIML Class	II
Maximum quantity of verification units	30000 e
Physical parameters	
Display	5,7" Resistiv-Farb-Touchscreen
Weighing pan dimensions	800×600 mm
Device dimensions	360×313×170 mm
Packaging dimensions	800×1000×437 mm
Net weight	71,5 kg
Gross weight	119 kg
Construction	
Protection class	IP 66/67 construction, IP 43 indicator
Construction	mild steel St3S
Weighing pan material	Stainless steel AISI304
Communication interface	
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+10 ÷ +40 °C
Relative humidity	40% ÷ 80%

Repeatability is expressed as the standard deviation of ten load placements. Relative humidity under non-condensing conditions. Stabilization time under optimal environmental conditions.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Extra payment for verification



Accessories

Displays

Transponder card readers

RS 232 cables (scale - Ethernet)

RS 232 cables (scale - printer)

Barcode scanners

Label Printers

Receipt Printer

Additional Weighing platforms Module

RS 232 – USB Converter

Software

E2R System

Label Editor R02

R-LAB







RADWAG Development Studio

RAD-KEY

RADWAG Remote Desktop

Scales Editor 2.1

Device dimensions

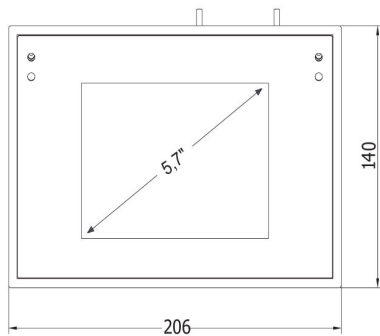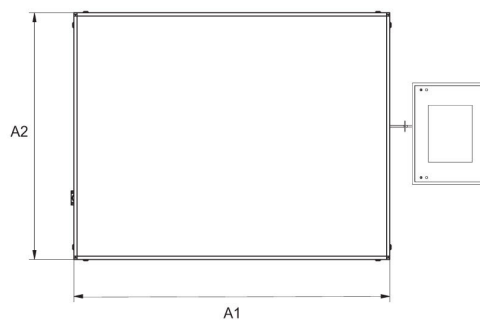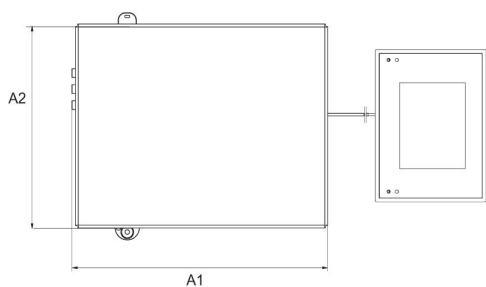

Scale type	A1	A2	H
PUE7.1.16 - 32.HRP	360	280	139±3
PUE7.1.62 - 120.HRP	500	500	175±3
PUE7.1.150 - 300.HRP	800	600	175±3
PUE7.1.300.1 - 1100.HRP	1000	800	175±3
PUE7.1.2000.HRP	1250	1000	175±3

dimensions in mm